


**OR-MDLA-PG - Brass cable gland with PG thread, nickel plated**

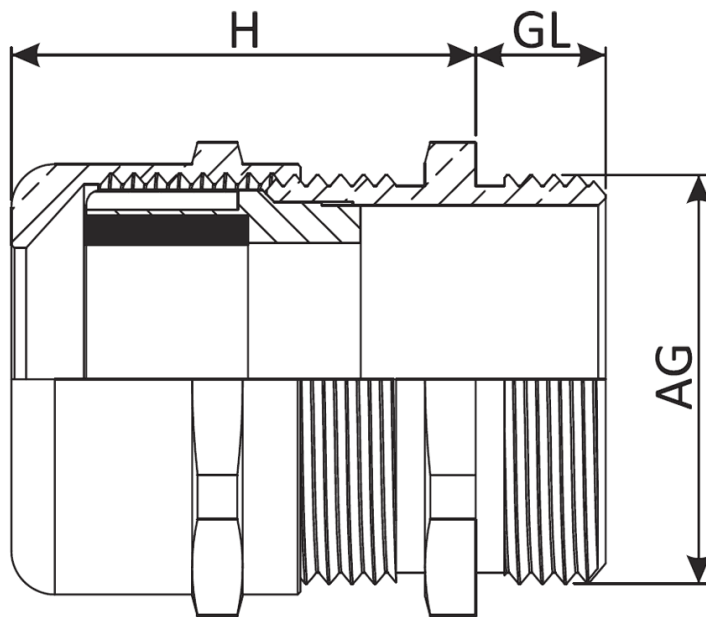

**Details:**

- **Material:**
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V-2
  - Sealing ring: TPV
  - O-Ring: NBR
- **Thread:** PG (DIN 40430)
- **Protection class:** IP68 (5 bar)
- **Temperature range:** -40°C to +100°C
- **Easy to assemble**
- **Halogen free**

Symbol	PG thread	H	Thread length GL	Wrench size	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	
OR-MDLA-PG11	PG11	24.5	6	20	5 - 10	brass, nickel plated