


**OR-MDLA-PG - Brass cable gland with PG thread, nickel plated**

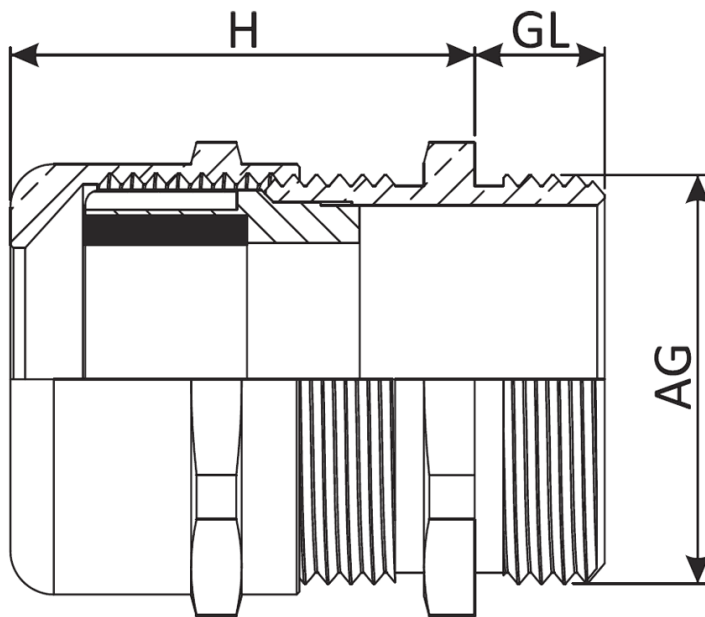

**Details:**

- Material:
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V-2
  - Sealing ring: TPV
  - O-Ring: NBR
- Thread: PG (DIN 40430)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

Symbol	PG thread	H	Thread length GL	Wrench size	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	
OR-MDLA-PG13.5	PG13.5	26.5	6.5	22	6 - 12	brass, nickel plated