


OR-MDLA-PG - Brass cable gland with PG thread, nickel plated

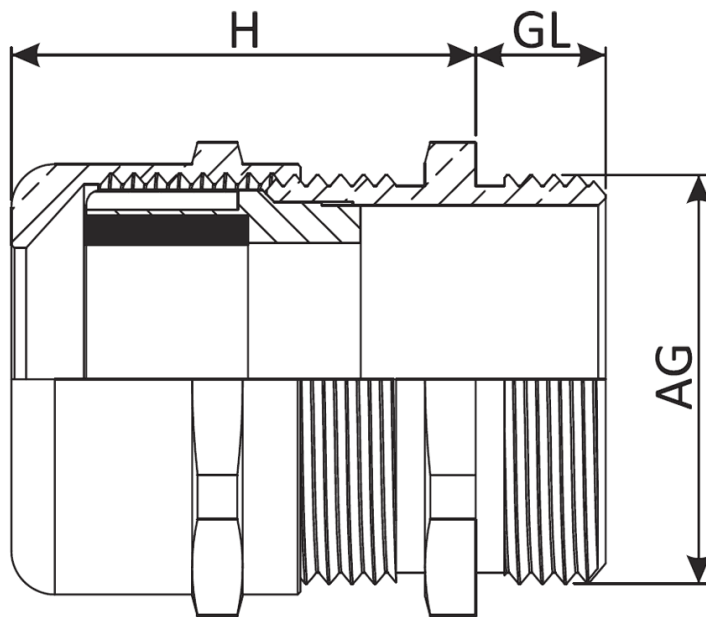

Details:

- **Material:**
 - Body: brass, nickel plated
 - Clamping insert: PA6 UL94 V-2
 - Sealing ring: TPV
 - O-Ring: NBR
- **Thread:** PG (DIN 40430)
- **Protection class:** IP68 (5 bar)
- **Temperature range:** -40°C to +100°C
- **Easy to assemble**
- **Halogen free**

Symbol	PG thread	H	Thread length GL	Wrench size	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	
OR-MDLA-PG13.5-L-RS	PG13.5	26.5	10	22	4 - 10	brass, nickel plated