


OR-MDLA-PG - Brass cable gland with PG thread, nickel plated

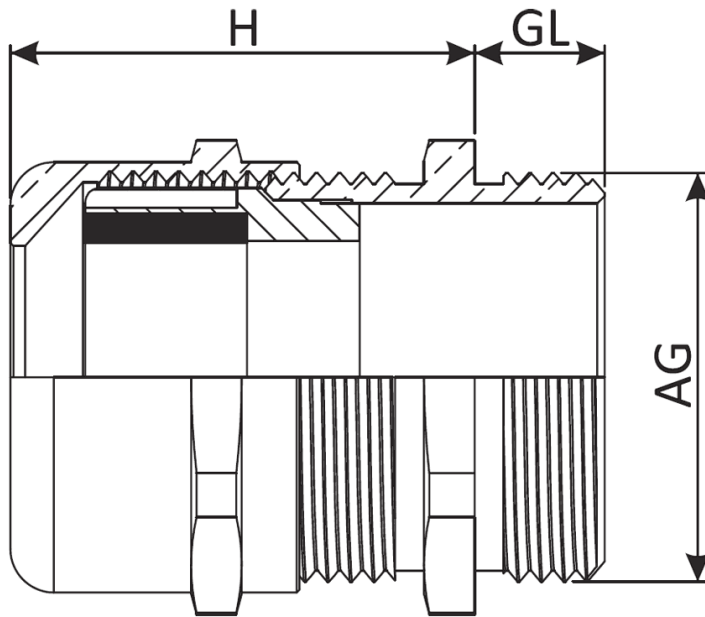

Details:

- **Material:**
 - Body: brass, nickel plated
 - Clamping insert: PA6 UL94 V-2
 - Sealing ring: TPV
 - O-Ring: NBR
- **Thread:** PG (DIN 40430)
- **Protection class:** IP68 (5 bar)
- **Temperature range:** -40°C to +100°C
- **Easy to assemble**
- **Halogen free**

| Symbol | PG thread | H | Thread length GL | Wrench size | Cable diameter range | Material |
|---------------|-----------|------|---------------------|-------------|----------------------|----------------------|
| | | [mm] | [mm] | [mm] | [mm] | |
| OR-MDLA-PG7-L | PG7 | 22 | 10 | 14 | 3 - 6.5 | brass, nickel plated |