


OR-ZOD - Blind stops

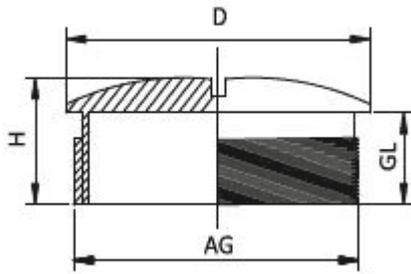

Details:

- **Screw plug material: Polyamide PA6 UL94 V-2**
- **Sealing ring: NBR (on special order)**
- **Colour:**
 - **Grey: RAL 7001**
 - **Light grey: RAL 7035**
 - **Czarny: RAL 9005**
- Connection thread: Metric (EN 60423)/PG (DIN 40430)
- Certificates: ROHS,CE,PT,TUV
- Protection class: IP54 / IP68 (with o-ring)
- Temperature range: -20°C to +100°C. Short term: -30°C to +150°C
- For unused threaded holes
- UV resistance
- Halogen free

| Symbol | Metric thread | PG thread | H | Thread length GL | D | Material | Flammability | Color |
|----------------|---------------|-----------|------|---------------------|------|----------|--------------|------------|
| | | | [mm] | [mm] | [mm] | | | |
| OR-ZOD-PG7-LGR | - | PG7 | 8 | 6 | 15 | PA 6 | UL94 V-2 | light grey |