



RRC - Round Cables Suppression Cores

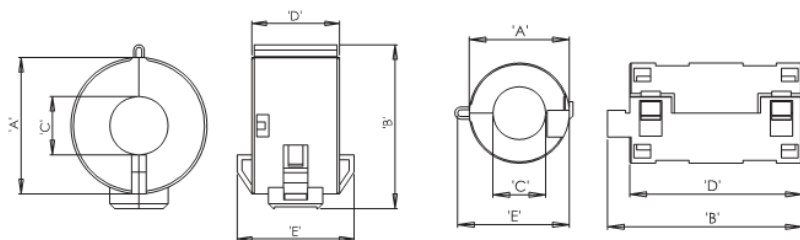


Rys. 1

Rys. 2

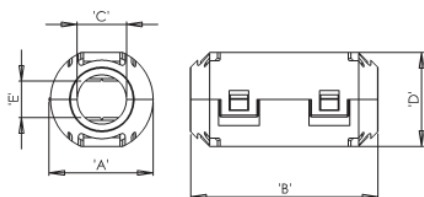


Rys. 3

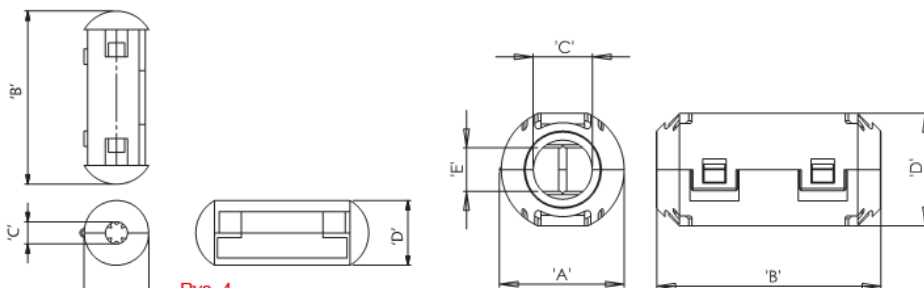

Rys. 4

Rys. 5

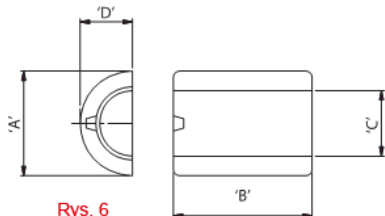

Rys. 6



Details:

- Ferrite material: K5B, RMS-303*
- Casing material: Black Nylon 6/6 RMS-244*

| Symbol | A | B | C | D | E | Impedance @25MHz | Impedance @100MHz | Fig. | Max. cable diameter | Standard pack |
|--------------------|------|------|------|------|------|------------------|-------------------|------|---------------------|---------------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [Ω] | [Ω] | | [mm] | [szt./pcs] |
| RRC-25-15-12-M-K5B | 29 | 33 | 15 | 15.5 | 21.5 | 45 | 100 | 1 | 15 | 36 |