


## RSH - Multiple Suppressor Beads

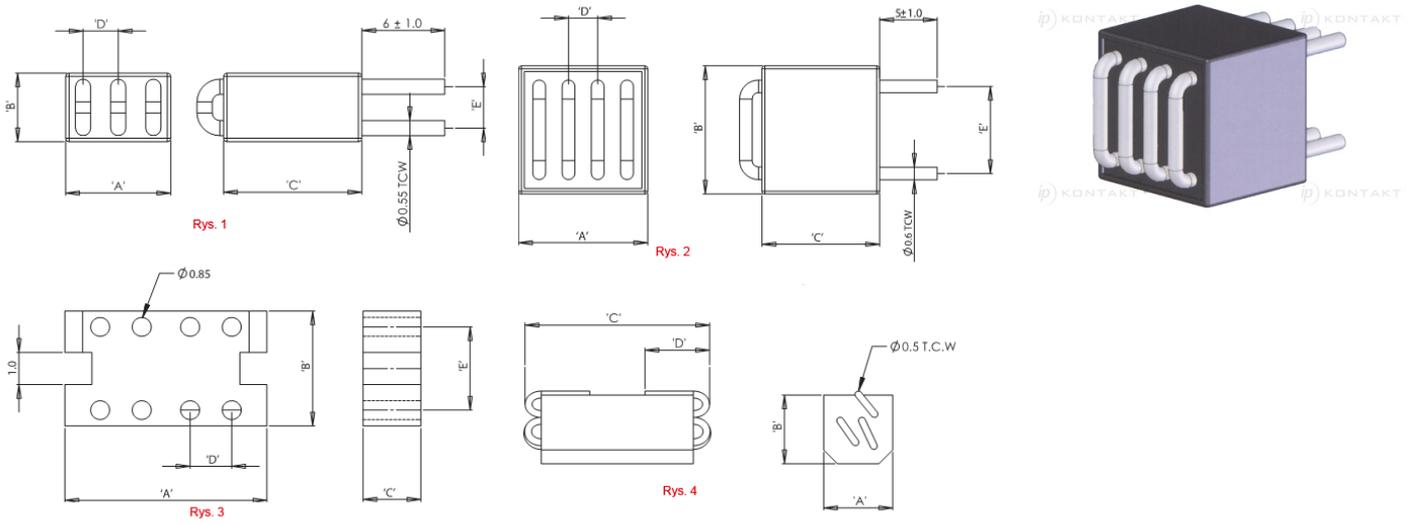

### Details:

- **Ferrite Material: K5B A5 RMS-303\***
- **Wire: RMS-307\***
- **Glue: RMS-301\***
- Used to filter power input pins, oscillators or logic devices using high speed clocks
- Filters low frequency input/output signals entering or exiting shielded enclosures
- Filters high frequency of medium speed docks and video signals
- Prevents oscillation in high frequency amplifiers.
- Available in a wide range of dimensions from 5 mm to 11.2 mm (see dimension A in table for reference)
- Custom sizes are available by special order
- Impedance figures are typical values and based on single turn measurements

Symbol	A	B	C	D	E	Impedance @25MHz	Impedance @100MHz	Fig.	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]	[Ω]	[Ω]		[szt./pcs]
RSH6-76-100-50-A5	7.6	5	10	2.54	2.54	216	253	1	200