

**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# RT - Toroid Cores

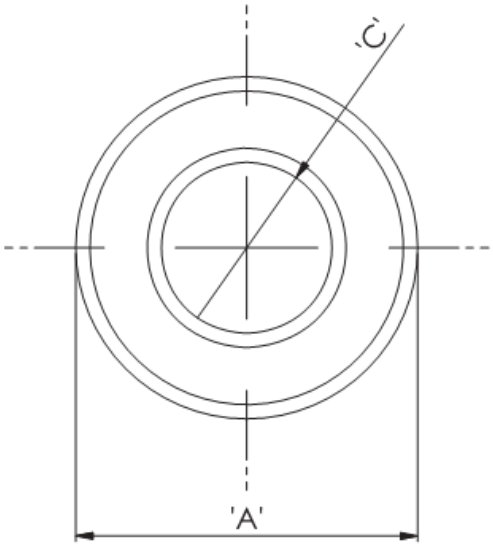

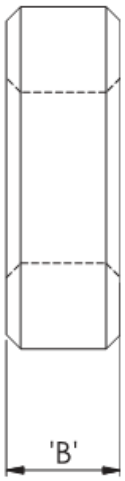


Details:

- **Ferrite Material: K5B RMS-303***
- RT type ring cores are mainly used for coupling transformers, balancing coils, fixed coils and filter coils
- The RT type ferrite cores can be used for a wide range of cable diameters from 0.8 mm to 36 mm (see dimension C in table for reference)
- Mainly used as a multi-turn suppression core
- Custom sizes are available by special order
- Impedance figures are typical values and based on single turn measurements
- Standard Pack sizes may vary

| Symbol | A | B | C | Impedance @25MHz | Impedance @100MHz | Standard pack |
|---|---|---|---|---|---|---|
| | [mm] | [mm] | [mm] | [Ω] | [Ω] | [szt./pcs] |
| RT-280-160-75-K5B | 28 | 7.5 | 16 | 33 | 59 | 100 |