


 IP Kontakt
 tel. +48 42 676 75 25

 Pl. Zwycięstwa 2E
 +48 42 674 22 74

 90-312 Łódź
 +48 42 674 22 88

Poland e-mail: ipkontakt@ipkontakt.pl

## **RT - Toroid Cores**

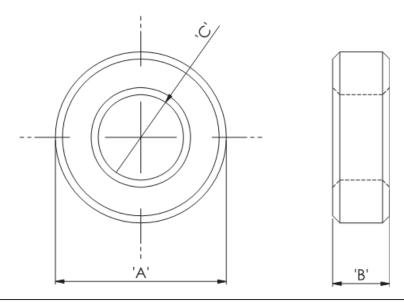



## Details:

- Ferrite Material: K5B RMS-303\*
- RT type ring cores are mainly used for coupling transformers, balancing coils, fixed coils and filter coils
- The RT type ferrite cores can be used for a wide range of cable diameters from 0.8 mm to 36 mm (see dimension C in table for reference)
- Mainly used as a multi-turn suppression core
- Custom sizes are available by special order
- Impedance figures are typical values and based on single turn measurements
- Standard Pack sizes may vary

| Symbol           | А    | В    | С    | Impedance @25MHz | Impedance @100MHz | Standard pack |
|------------------|------|------|------|------------------|-------------------|---------------|
|                  | [mm] | [mm] | [mm] | [Ω]              | [Ω]               | [szt./pcs]    |
| RT-44-28-14-A5 1 | 4.4  | 1.4  | 2.8  | 12               | 32                | 5000          |

ipkontakt.pl Page 1 of 1