


## SKL - 45° Kurly Lock

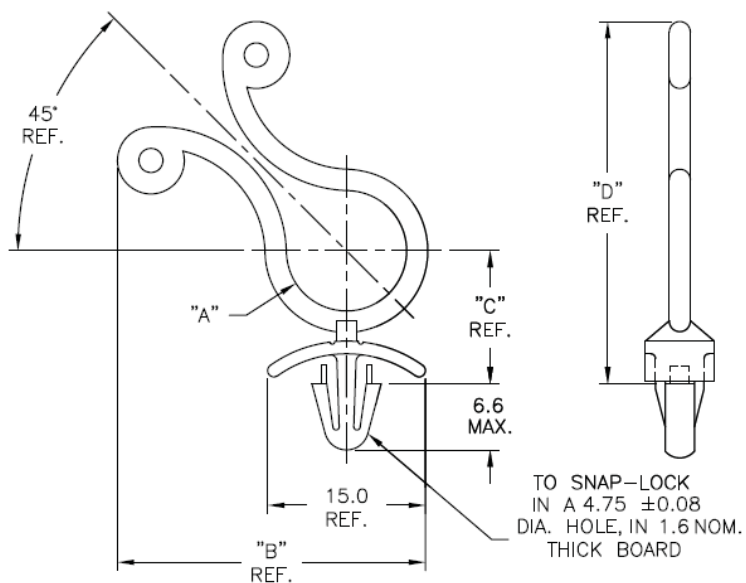

### Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-01\*
- **Material:** UL94 V2 Nylon 6/6, RMS-19\*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

| Symbol       | Cable diameter range<br>A | B    | C    | D    | Mounting hole<br>diameter<br>±0.08 | Panel thickness | Material | Flammability | Color   |
|--------------|---------------------------|------|------|------|------------------------------------|-----------------|----------|--------------|---------|
|              | [mm]                      | [mm] | [mm] | [mm] | [mm]                               | [mm]            |          |              |         |
| SKL45-350-19 | 7.6 - 10.2                | 27.2 | 10.9 | 30.5 | 4.75                               | 1.6             | PA 66    | UL94 V-0     | natural |