



SRB - Strain Relief Bushing

BUSHING DIMENSIONS




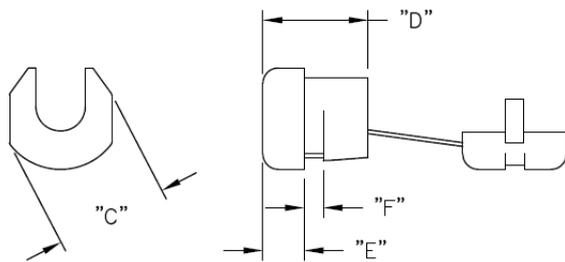


MOUNTING HOLE

STYLE A



STYLE B

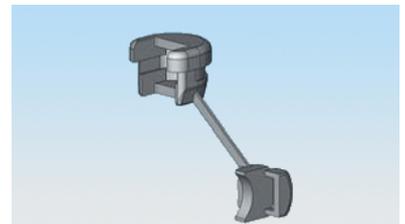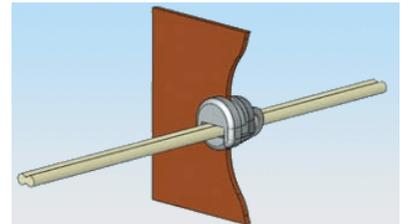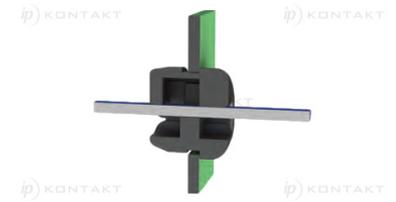

Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-315*
- **Color:** Black
- **Standard pack:** see table

| Symbol | For wires | Shape | Wire width | Wire height | A | B | C | D | E | F | Notes | Material | Flammability | Color | Standard pack |
|-----------|--|-------|------------|-------------|-------|-------|-------|------|------|------|----------|----------|--------------|-------|---------------|
| | | | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | | | | | [mm] |
| SRB-F-4-1 | SP-2. SPT-2 #16/2. HPN #16/2 | flat | 4.1 | 7.6 | 13.08 | 11.81 | 14.48 | 12.7 | 4.34 | 2.54 | No UL | PA 66 | UL94 V-2 | black | 500 |