


## SRHR - Snap Rivet Heat Resistant

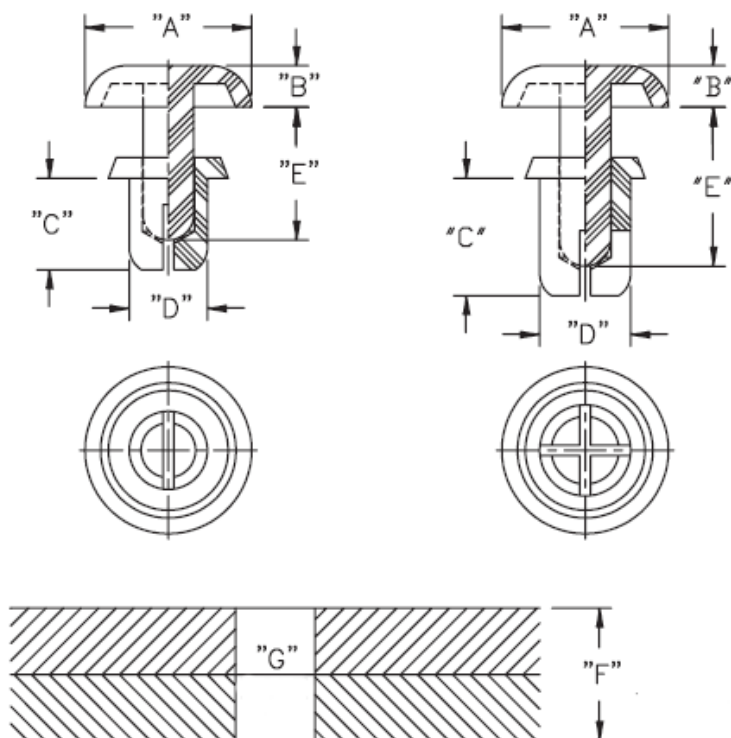

### Details:

- **Material:** UL94 V2 Nylon 4/6, RMS-109\*
- **Color:** Tan
- Working temperature upto: +152°C
- Standard Pack: 1000/Bag

| Symbol    | Mounting hole diameter range G | Panel thickness range F | A ±0.2 | B ±0.2 | C ±0.3 | D    | E ±0.3 | Material | Flammability | Color |
|-----------|--------------------------------|-------------------------|--------|--------|--------|------|--------|----------|--------------|-------|
|           | [mm]                           | [mm]                    | [mm]   | [mm]   | [mm]   | [mm] | [mm]   |          |              |       |
| SRHR-3080 | 3.1 - 3.2                      | 5.0 - 6.5               | 6      | 1.6    | 8      | 3    | 9      | PA 46    | UL94 V-2     | brown |