


TU-FEU-M - Metal cable glands, ATEX, metric

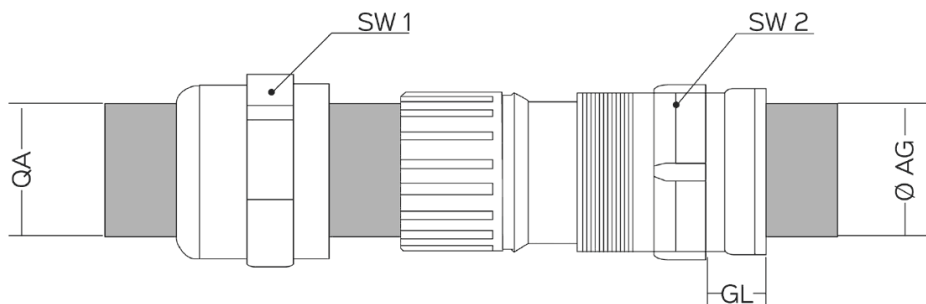

Details:

- **Body material: nickel-plated brass**
- Other available body materials: brass, stainless steel, aluminium
- **Seal material: NBR**, working temperature: -30°C to 120°C
- Other available seal material:
 - TPV - working temperature: -30°C to 120°C
 - Neoprene - working temperature: -40°C to 100°C
 - Silicone - temperatura pracy: -60°C to 180°C
- Thread: metric (EN60423)
- Certificates: IEP 17 ATEX 0516X, RoHS
- Application: Zone 1, Zone 2, Zone 21, Zone 22

Symbol	Metric thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]	
TU-FEU-M25SNBBN	M25×1.5	10.0 - 14.0	16	8	24	27	25	brass, nickel plated