



## WIT-RA/SA - Arrowhead Ties

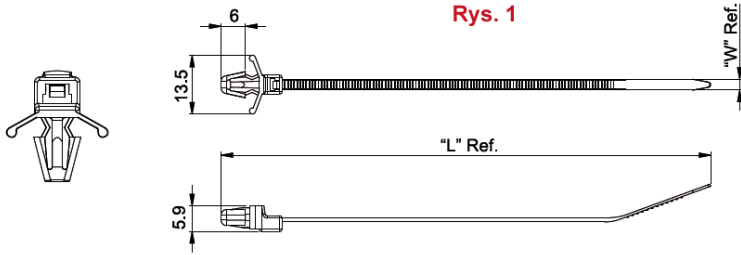

**Rys. 1**

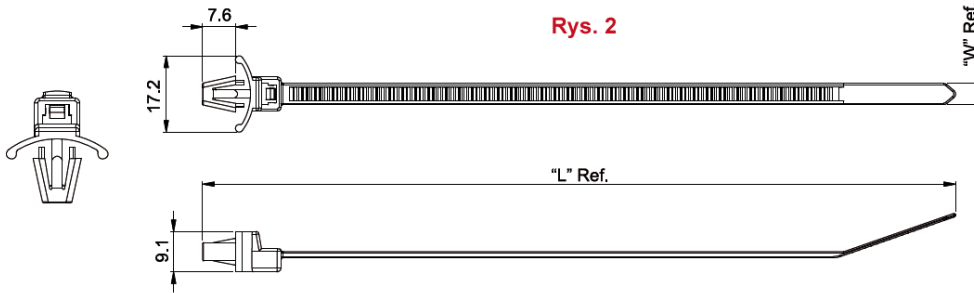

**Rys. 2**



**Details:**

- **Nylon 6/6, UL94 V-2, RMS-01 \***
- **UVB Nylon 6/6, UL94 V-2, RMS-46 \***
- **Color:** NAT - natural, BK - black

Symbol	Fig.	Tensile strength	Length L	Max. cable bundle diameter	Width W	Mounting hole diameter range	Panel thickness range	Standard pack	MoQ [pcs]	Material	Flammability	Color
		[daN]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]				
WIT-50RA-1-01-UVB	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	50000	PA 66 UVB	UL94 V-2	black