






## WSLTB - Wire Saddle Locking Top on Base



Montaż w otworze Ø3.2  
 nit z serii SR-3000 lub śruba #4 (M3)

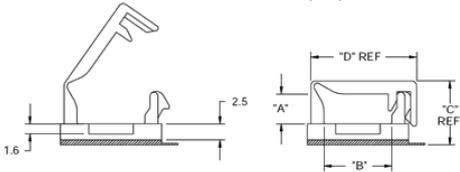

Rys. 2

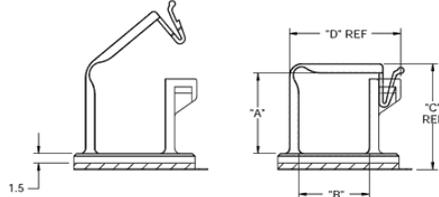

Details:

- **Material:** UL94 V0 Nylon, 6/6, RMS-19\*
- **Adhesive back,** RMS-15\*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Fig.	A	B	C	D	E	F	Mounting	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
WSLTB-02A-19	1	10	16.3	14.7	22.4	21.5	12.7	Any *SR-3XXX rivet or #4 or M3 screw	PA 66	UL94 V-0	natural