


BM-RWR - Wkładka regulowana do rur okrągłych

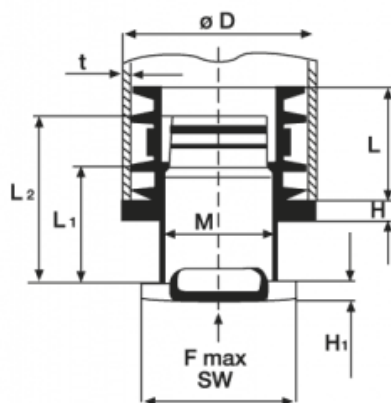

Dane techniczne:

- **Materiał:** Nylon 6
- **Kolor:** czarny

Symbol	Średnica wkładki D	Obciążenie maks.	H	H ₁	L	L ₁	L ₂	Gwint metryczny M	Rozmiar klucza SW	Zakres grubości ścianki rury t	Materiał	Kolor
	[mm]								[mm]			
BM-RWR-32-20	32	300	5	5	19.7	20	29.5	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-32-60	32	300	5	5	19.7	60	-	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-35-20	35	300	5	5	29.3	20	29.5	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-35-60	35	300	5	5	29.3	60	-	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-38-20	38	300	5	5	29.3	20	29.5	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-38-60	38	300	5	5	29.3	60	-	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-40-20	40	300	5	5	29.3	20	29.5	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-40-60	40	300	5	5	29.3	60	-	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-42-28	42	300	5	5	29.3	28	40.5	M30	41	1.5 - 2.0	PA 6	czarny
BM-RWR-45-28	45	300	5	5	29.3	28	40.5	M30	41	1.5 - 2.0	PA 6	czarny
BM-RWR-48-20	48	300	5	5	29.3	20	29.5	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-48-60	48	300	5	5	29.3	60	-	M22	28	1.5 - 2.0	PA 6	czarny
BM-RWR-50-28	50	300	5	5	29.3	28	40.5	M30	41	1.5 - 2.0	PA 6	czarny
BM-RWR-60-40	60	300	6	10	34.7	40.3	-	M42	58	1.5 - 2.0	PA 6	czarny
BM-RWR-80-40	80	300	6	10	34.7	40.3	-	M56	74	1.5 - 2.0	PA 6	czarny