


BM-WSL - Wkładki kopułkowe

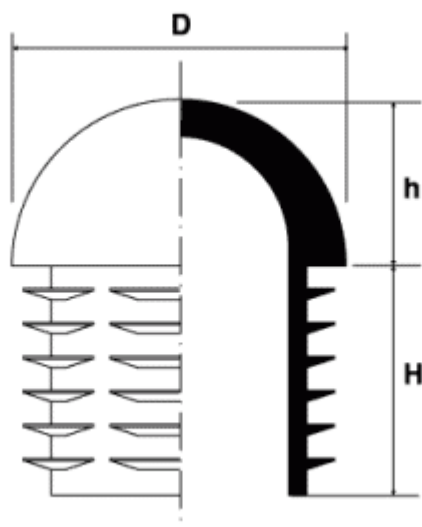

Dane techniczne:

- **Material: LDPE**
- **Kolor: czarny**

Symbol	Średnica wkładki D	Zakres grubości ścianki rury	H	h	Materiał	Kolor
	[mm]		[mm]	[mm]		
BM-WSL-160-10	16	1.0 - 2.0	12	7.5	LDPE	czarny
BM-WSL-180-10	18	1.0 - 2.0	12	8	LDPE	czarny
BM-WSL-200-10	20	1.0 - 2.0	15.5	9.5	LDPE	czarny
BM-WSL-220-10	22	1.0 - 1.5	15.5	10.5	LDPE	czarny
BM-WSL-220-15	22	1.5 - 2.0	15.5	10.5	LDPE	czarny
BM-WSL-250-10	25	1.0 - 2.0	15.5	10.5	LDPE	czarny
BM-WSL-300-10	30	1.0 - 2.0	17.5	13.5	LDPE	czarny
BM-WSL-320-10	32	1.0 - 2.0	19.5	15.5	LDPE	czarny
BM-WSL-350-10	35	1.0 - 2.0	19.5	16.5	LDPE	czarny
BM-WSL-400-15	40	1.5 - 2.0	12	20	LDPE	czarny
BM-WSL-420-15	42	1.5 - 2.5	30	21	LDPE	czarny
BM-WSL-450-15	45	1.5 - 2.5	30	22	LDPE	czarny
BM-WSL-483-15	48.3	1.5 - 2.5	30	24.2	LDPE	czarny
BM-WSL-500-15	50	1.5 - 2.5	30	25	LDPE	czarny
BM-WSL-600-15	60	1.5 - 2.5	40	30	LDPE	czarny