




CSR/CSP - Tulejka z kołnierzem

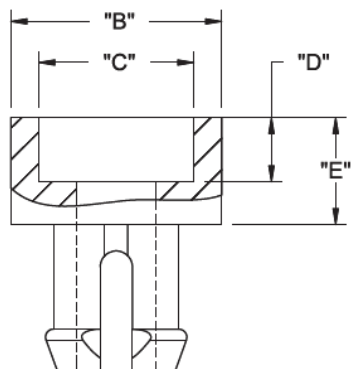

CSP(PIN)



CSR (RETAINER)

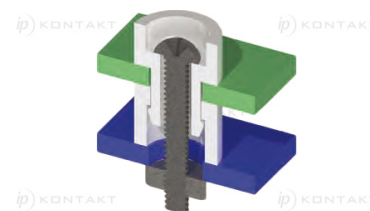

Dane techniczne:

- **Nylon 6/6, UL 94 V-2, RMS-01 ***
- **Kolor:** naturalny - NAT
- **CSP: Otwór górny:** patrz tabela, **grubość panelu:** Max. 2.36
- **CSP: Otwór dolny:** patrz tabela
- Minimum zakupu: 1000 szt.

Symbol	Wysokość A	B	Kołek	Materiał
	[mm]	[mm]		
CSR4-224-01	5.7	7.5	CSP4-01	PA 66
CSR4-295-01	7.5	7.5	CSP4-01	PA 66
CSR4-394-01	10	7.5	CSP4-01	PA 66
CSR4-591-01	15	7.5	CSP4-01	PA 66
CSR4-787-01	20	7.5	CSP4-01	PA 66
CSR6-224-01	5.7	10	CSP6-01	PA 66
CSR6-295-01	7.5	10	CSP6-01	PA 66
CSR6-394-01	10	10	CSP6-01	PA 66
CSR6-591-01	15	10	CSP6-01	PA 66
CSR6-787-01	20	10	CSP6-01	PA 66
CSR8-224-01	5.7	11	CSP8-01	PA 66
CSR8-295-01	7.5	11	CSP8-01	PA 66
CSR8-394-01	10	11	CSP8-01	PA 66
CSR8-591-01	15	11	CSP8-01	PA 66
CSR8-787-01	20	11	CSP8-01	PA 66

Zalecany rozmiar śruby:

Symbol	Średnica otworu montażowego ±0.08	B ±0.25	C	D	E	Zalecany rozmiar śruby	Opakowanie	Kolor
	[mm]						[szt.]	
CSP4-01	5.0	7.5	-	-	2.5	M2.5	1000	NAT

Symbol	Średnica otworu montażowego ±0.08	B ±0.25	C	D	E	Zalecany rozmiar śruby	Opakowanie	Kolor
	[mm]						[szt.]	
CSP6-01	6.5	10.0	7.4	3.0	5.1	M3.5	1000	NAT
CSP8-01	6.9	11.1	8.4	3.6	5.6	M4	1000	NAT