


FP-10646 - Uchwyt kablowy

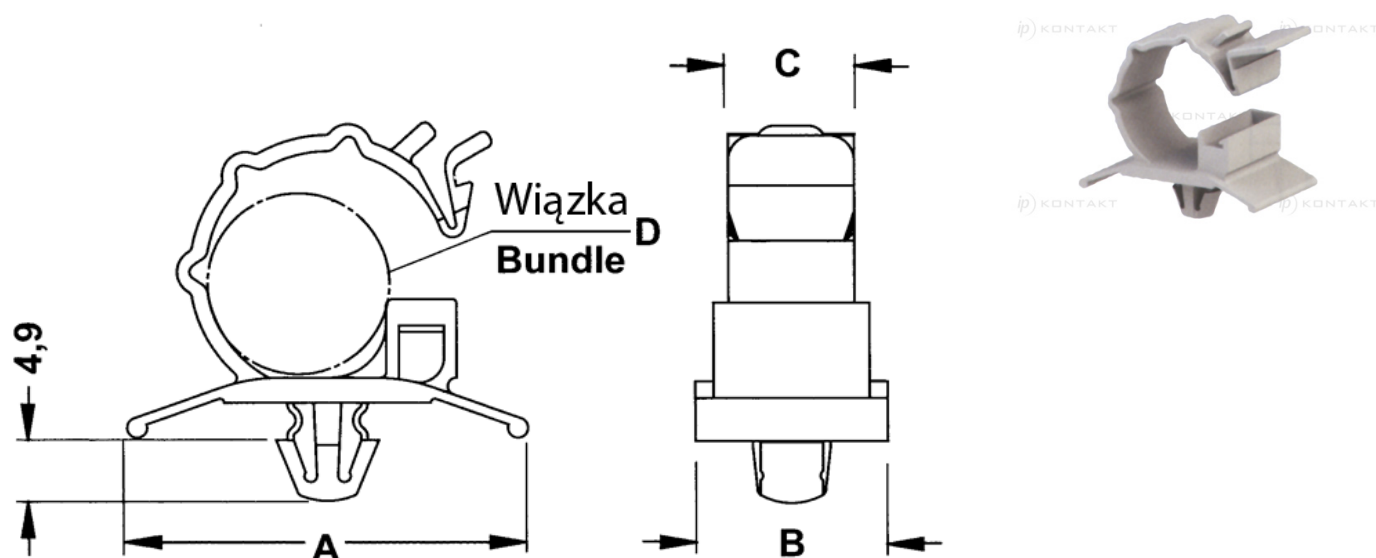

Dane techniczne:

- **Materiał:** PA 6.6 UL94V2
- **Kolor:** szary
- Temperatura pracy: -35°C - 85°C
- Opakowanie: 200 szt.

Symbol	A	B	C	Maks. średn. wiązki kablowej D	Średnica otworu montażowego	Zakres grubości panelu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
10646AA11	27	15	9.8	7	6.4	0.8 - 2.3	PA 66	UL94 V-2	szary
10647AA11	30.8	17.2	12	10.3	6.4	0.8 - 2.3	PA 66	UL94 V-2	szary
10648AA11	32	19.2	13.9	13	6.4	0.5 - 2.3	PA 66	UL94 V-2	szary
10649AA11	32	19.3	14	14.5	6.4	0.8 - 2.3	PA 66	UL94 V-2	szary
10650AA11	35	21.3	15.8	16	6.4	0.5 - 2.3	PA 66	UL94 V-2	szary
10651AA11	37.5	23.2	18	20	6.4	0.5 - 2.3	PA 66	UL94 V-2	szary
10652AA11	37.5	23.2	18	20	6.4	2.3 - 4.1	PA 66	UL94 V-2	szary