
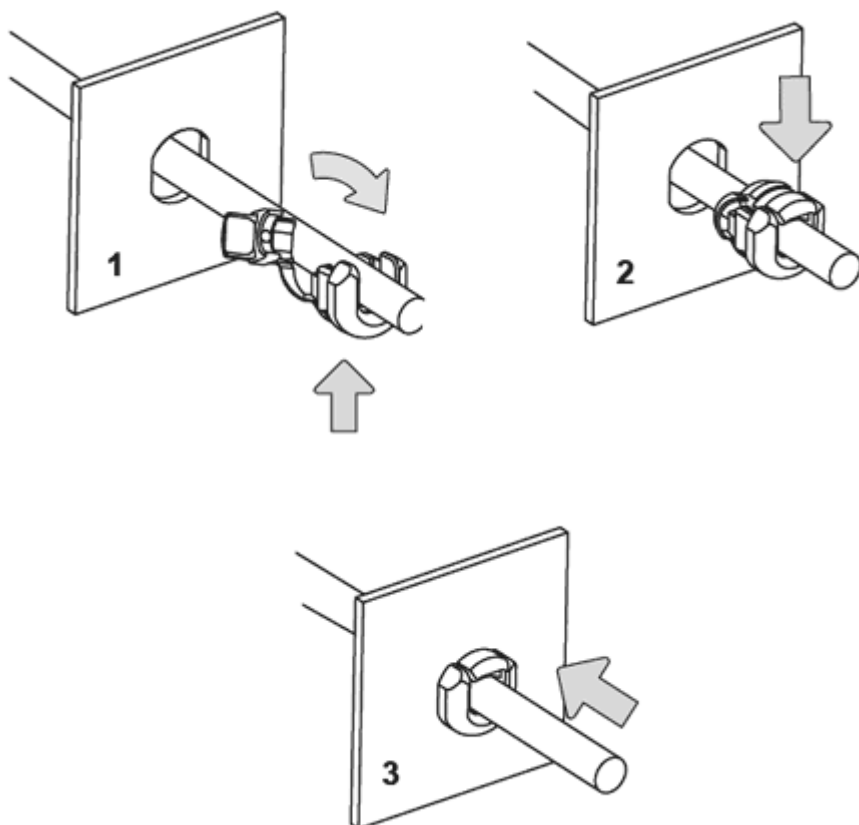


FP-10862 - Obejma kablowa wciskana w otwór

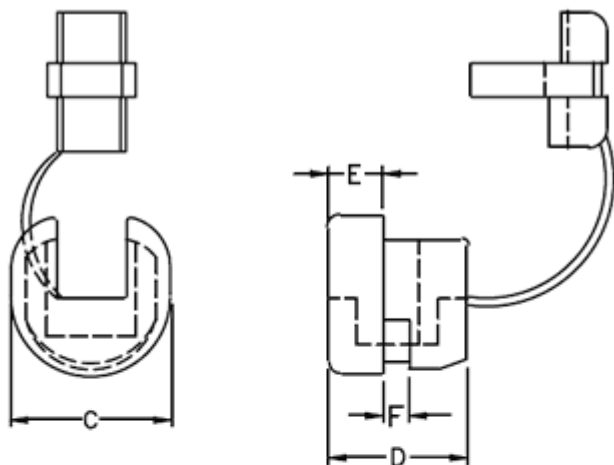

Dane techniczne:

- **Materiał:** Nylon 6.6 UL94V2
- **Kolor:** czarny
- Temperatura pracy: -35°C do +85°C
- Opakowanie: 1000 szt.

Symbol	A	B	C	D	E	Zakres grubości panelu F	Szerokość przewodu	Wysokość przewodu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
10862AA01	12.7	11.8	14	12.4	4	1.8 - 2.5	4.1	8.6	PA 66	UL94 V-2	czarny
10863AA01	14.3	13.4	15.5	15.4	6.2	0.8 - 1.6	5	10	PA 66	UL94 V-2	czarny
10864AA01	14.3	13.4	15.5	15.4	6.2	1.8 - 3.2	5	10	PA 66	UL94 V-2	czarny
10865AA01	15.9	14	16.5	14.9	5.8	2.0 - 2.5	3.6	7	PA 66	UL94 V-2	czarny
10865AA01-1	15.9	14	16.5	14.9	5.8	2.0 - 2.5	4.1	10.4	PA 66	UL94 V-2	czarny
10866AA01	9.5	8.7	10.4	10.4	4	1.6	2.8	5.3	PA 66	UL94 V-2	czarny
10867AA01	11	9.9	11.5	10.4	4	1.6	2	5.6	PA 66	UL94 V-2	czarny
10868AA01	11	9.9	11.5	10.4	4	2.5	2	5.6	PA 66	UL94 V-2	czarny
10869AA01	12.7	11.8	13.3	10.4	4	1.6	3.8	7.1	PA 66	UL94 V-2	czarny
10869AA01-1	13.1	11.8	13.3	10.4	4	1.6	4.1	7.6	PA 66	UL94 V-2	czarny