


FP-22100 - Obejmy kablowe wciskane w otwór

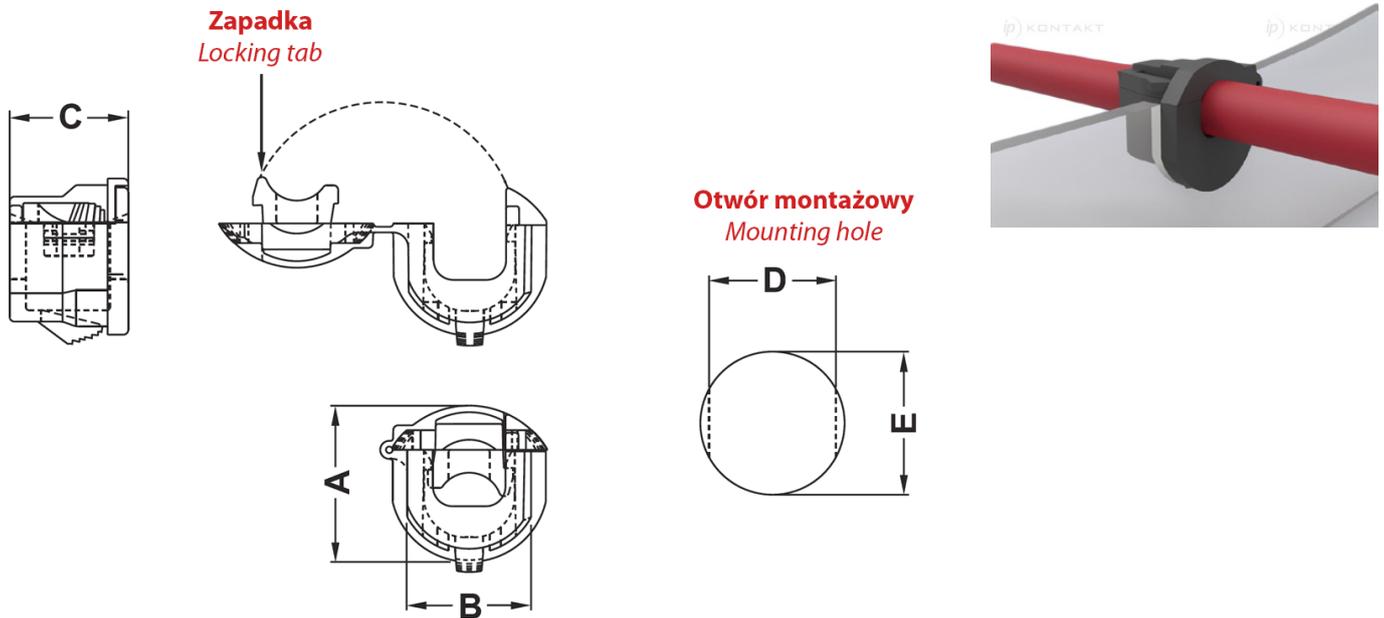

Dane techniczne:

- **Materiał:** PA 6.6
- **Klasa palności:** UL94 V-2
- **Kolor:** czarny
- Temperatura pracy: -35°C do 85°C
- Opakowanie: 1000 szt.

Symbol	A	B	C	D	E	Zakres grubości panelu	Zakres średnicy przewodu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
22100AA01	17.4	13.5	14	14	15.9	0.8 - 2.5	3.3 - 5.3	PA 66	UL94 V-2	czarny
22101AA01	17.4	13.5	14	14	15.9	0.8 - 2.5	5.6 - 7.4	PA 66	UL94 V-2	czarny
22103AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	7.4 - 9.8	PA 66	UL94 V-2	czarny
22104AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	7.4 - 9.8	PA 66	UL94 V-2	czarny
22105AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	8.6 - 10.9	PA 66	UL94 V-2	czarny
22106AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	8.6 - 10.9	PA 66	UL94 V-2	czarny
22107AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	10.7 - 11.4	PA 66	UL94 V-2	czarny
22108AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	10.7 - 11.4	PA 66	UL94 V-2	czarny
22109AA01	30.5	24.9	23.1	25.4	28.2	1.6 - 4.8	13.5 - 15.2	PA 66	UL94 V-2	czarny
22110AA01	33.8	24.9	31.8	25.4	28.2	1.6 - 4.8	15.2 - 17.8	PA 66	UL94 V-2	czarny