


FP-22780 - Tulejki izolacyjne

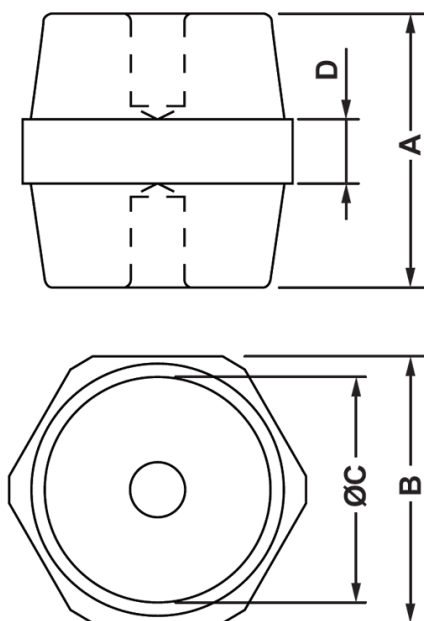

Dane techniczne:

- **Materiał:**
 - wkładka: gwintowana: stal cynkowana
 - korpus: żywica poliestrowa, 20% włókno szkalne
- **Kolor: czerwony**
- Klasa palności: UL94 V-0
- Temperatura pracy: -40°C do 140°C

Symbol	Gwint wewn.	Wysokość A	Rozmiar klucza B	C	D	Opakowanie
		[mm]	[mm]	[mm]	[mm]	[szt./pcs]
22780PT04	M4	16	15	12	4	1000
22781PT04	M4	20	19	16	5	750
22782PT04	M4	25	22	18	6	600
22800PT04	M5	16	15	12	4	1500
22801PT04	M5	20	19	16	5	750
22802PT04	M5	25	19	15	5	750
22806PT04	M5	25	22	18	6	600
22821PT04	M6	20	19	16	5	750
22822PT04	M6	25	19	15	5	600
22823PT04	M6	25	22	18	6	600
22825PT04	M6	30	30	25	7	200
22827PT04	M6	35	32	28.5	10	320
22829PT04	M6	50	36	29	12	240
17953PT04	M8	25	22	18	6	600
22866PT04	M8	30	30	25	7	400
22867PT04	M8	35	32	28.5	10	320
22868PT04	M8	30	40	33.5	8	300
22869PT04	M8	35	40	33	10	300
22872PT04	M8	40	46	40	12	200
22873PT04	M8	45	46	39.5	13	200
22874PT04	M8	50	36	29	12	240

Symbol	Gwint wewn.	Wysokość A	Rozmiar klucza B	C	D	Opakowanie
		[mm]	[mm]	[mm]	[mm]	[szt./pcs]
22875PT04	M8	50	50	45	15	120
22876PT04	M8	60	60	49.5	15	80
22878PT04	M8	75	50	38.5	16	120
22880PT04	M10	30	30	25	7	400
22881PT04	M10	30	40	33.5	8	400
22882PT04	M10	35	32	28.5	10	320
22883PT04	M10	35	40	33	10	300
22886PT04	M10	40	46	40	12	200
22887PT04	M10	45	46	39.5	13	200
22888PT04	M10	50	36	29	12	240
22889PT04	M10	50	46	37	10	200
22890PT04	M10	50	50	45	15	120
22891PT04	M10	60	60	49.5	15	80
22893PT04	M10	70	60	52	14	60
22894PT04	M10	75	50	38.5	16	120
22901PT04	M12	40	46	40	12	200
22902PT04	M12	45	46	39.5	13	200
22903PT04	M12	50	50	45	15	120
22905PT04	M12	70	60	52	14	60
22906PT04	M12	75	50	38.5	16	80
22910PT04	M16	70	60	52	14	80