
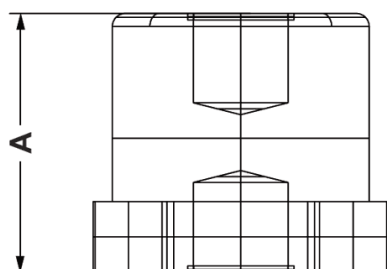


FP-22920 - Tulejki izolacyjne

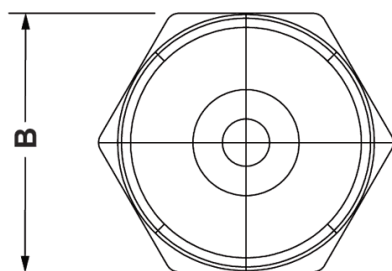

Dane techniczne:

- **Materiał:**
 - wkładka: gwintowana: stal cynkowana
 - korpus: żywica poliestrowa, 20% włókno szkalne
- **Kolor: czerwony**
- Temperatura pracy: -40°C do 140°C

Symbol	Gwint wewn.	Wysokość A	Rozmiar klucza B	Opakowanie
		[mm]	[mm]	[szt./pcs]
22920PT04	M5	20	20	750
22921PT04	M5	25	20	600
22922PT04	M5	30	20	600
22923PT04	M5	40	20	600
22924PT04	M5	50	20	600
22925PT04	M6	20	20	750
22926PT04	M6	25	20	600
22927PT04	M6	30	20	500
22928PT04	M6	40	20	300
22929PT04	M6	50	20	300
22940PT04	M6	30	30	300
22941PT04	M6	35	30	300
22942PT04	M6	40	30	300
22943PT04	M6	50	30	300
22944PT04	M6	60	30	300
22945PT04	M6	65	30	300
22946PT04	M8	30	30	500
22947PT04	M8	35	30	320
22948PT04	M8	40	30	500
22949PT04	M8	50	30	300
22950PT04	M8	60	30	300
22951PT04	M8	65	30	300

Symbol	Gwint wewn.	Wysokość A	Rozmiar klucza B	Opakowanie
		[mm]	[mm]	[szt./pcs]
22955PT04	M10	45	33	300
22960PT04	M8	30	40	300
22961PT04	M8	35	40	300
22962PT04	M8	40	40	240
22963PT04	M8	50	50	160
22964PT04	M8	60	40	300
22965PT04	M8	70	40	300
22966PT04	M10	30	40	300
22967PT04	M10	35	40	300
22968PT04	M10	40	40	300
22969PT04	M10	50	40	300
22970PT04	M10	60	40	300
22971PT04	M10	70	40	200
22975PT04	M12	40	60	300
22976PT04	M12	50	60	300
22977PT04	M12	60	60	300
22978PT04	M12	70	60	200
22979PT04	M12	80	60	200
22985PT04	M16	40	60	300
22986PT04	M16	50	60	200
22987PT04	M16	60	60	200
22988PT04	M16	70	60	200
22989PT04	M16	80	60	200