


FP-5574 - Wciskane tulejki dystansowe

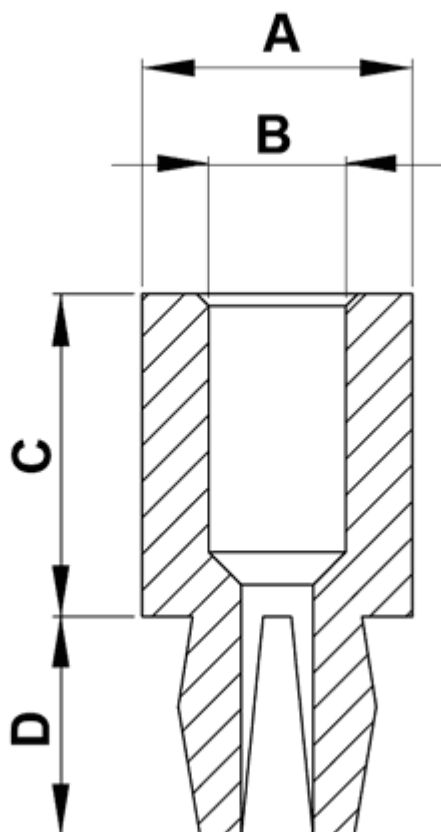

Dane techniczne:

- **Material:** Nylon 6.6
- **Kolor:** naturalny
- Klasa palności: UL94V2
- Temperatura pracy: -35°C do +85°C

Symbol	Średnica zewn. A	Średnica wewn. B	Wysokość C	D	Otwór montażowy	Zakres grubości panelu dolnego	Śruba	Opakowanie
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[szt./pcs]
5574AA00	6.7	3.4	3.2	5.4	4.5 x 4.5	0.8 - 2.3	4 P	2000
5575AA00	6.7	3.4	4.8	5.4	4.5 x 4.5	0.8 - 2.3	4 P	2000
5576AA00	6.7	3.4	6.3	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000
5577AA00	6.7	3.4	8	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000
5578AA00	6.7	3.4	10	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000
5579AA00	6.7	3.4	12.7	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000
5580AA00	6.7	3.4	15.9	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000
5581AA00	6.7	3.4	19.1	5.4	4.5 x 4.5	0.8 - 2.3	4 P	1000