


FP-5630 - Tulejka dystansowa samopodtrzymująca

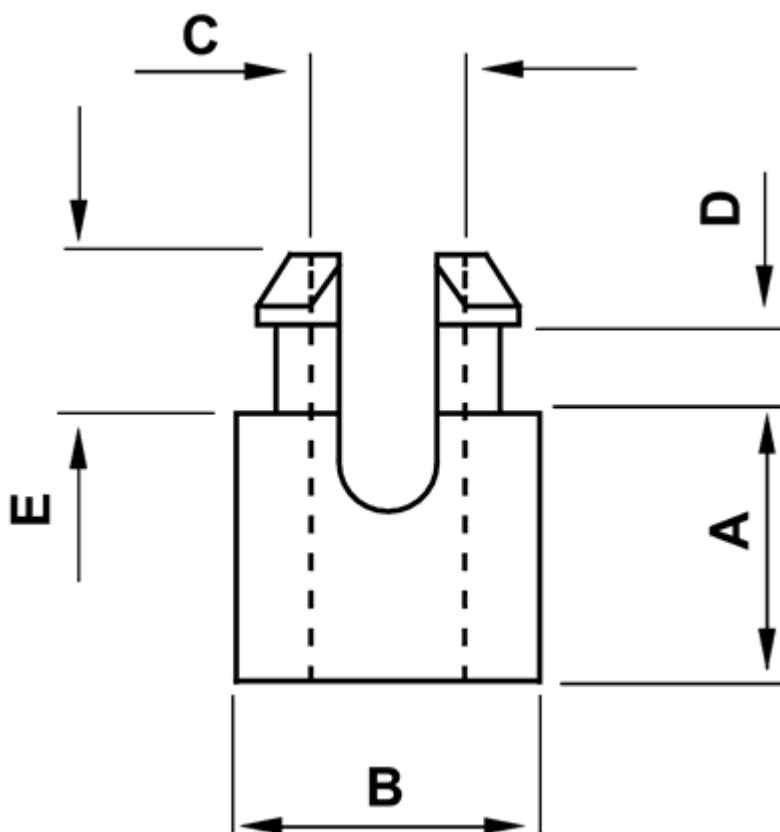

Dane techniczne:

- **Material:** Nylon 6.6
- **Kolor:** naturalny
- Klasa palności: UL94V2
- Temperatura pracy: -35°C do +85°C

Symbol	Wysokość A	Średnica zewn. B	Średnica wewn. C	D	E	Średn. otworu górnego	Zakres grubości panelu górnego	Opakowanie
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]
5630AA00	3.2	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5631AA00	3.5	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5632AA00	4	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5633AA00	4.5	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5634AA00	4.8	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5635AA00	6.4	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5636AA00	7.9	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5637AA00	9.5	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5638AA00	11.1	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5639AA00	12	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5640AA00	12.7	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5641AA00	14.2	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5642AA00	15	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5643AA00	15.9	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5644AA00	19.1	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	1000
5645AA00	22.2	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	500

Symbol	Wysokość A	Średnica zewn. B	Średnica wewn. C	D	E	Średn. otworu górnego	Zakres grubości panelu górnego	Opakowanie
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]
5646AA00	25.4	6.4	3.2	1.9	3.4	4.8	1.2 - 1.7	500