


FP-6249 - Uchwyty wciskane górne do kabli i rur

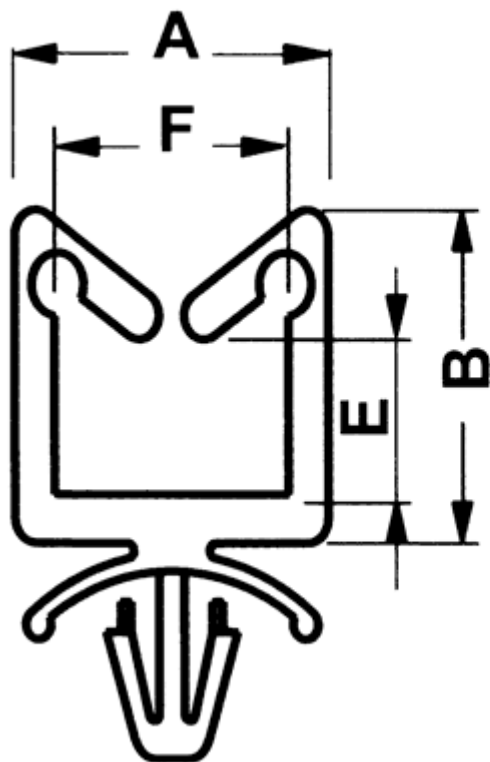

Dane techniczne:

- **Materiał:** PA 6.6 UL94V2
- **Kolor:** naturalny
- Temperatura pracy: -35°C - 85°C
- Opakowanie: 1000 szt.

Symbol	A	B	D	E	F	Średnica otworu montażowego	Zakres grubości panelu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6249AA00	15	12	5.3	5	11.2	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
5595AA00	15	17	5.3	10	11.2	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
6250AA00	15	26	5.3	19	11.2	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
6251AA00	15	34	5.3	27	11.2	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
9660AA00	15.5	13	5.6	4.8	11.1	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9661AA00	15.5	18	5.6	9.7	11.1	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9662AA00	15.5	26.9	5.6	18.5	11.1	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9663AA00	15.5	34.8	5.6	26.5	11.1	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny