
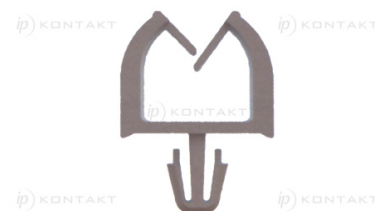
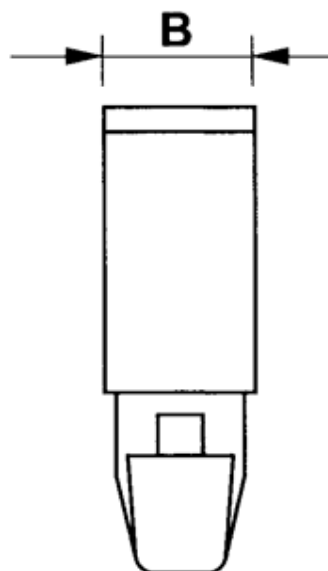


FP-6582 - Wciskane uchwyty do kabli

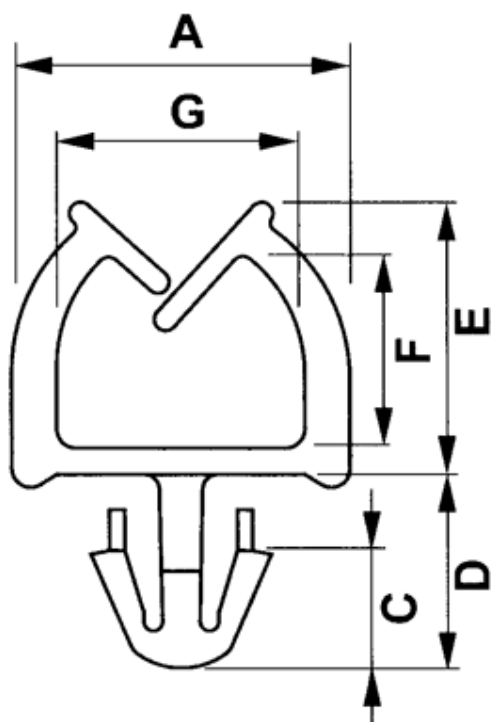

Dane techniczne:

- **Materiał:** PA 6.6 UL94V2
- **Kolor:** naturalny
- Temperatura pracy: -35°C - 85°C
- Opakowanie: 1000 szt.

Symbol	A	B	C	D	E	F	G	Średnica otworu montażowego	Zakres grubości panelu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6582AA00	9	4	3.4	5.3	7.3	4.8	6.6	3	1.6	PA 66	UL94 V-2	naturalny
5729AA00	9	4	3.2	5.2	7.3	4.8	6.6	3.5	1.6	PA 66	UL94 V-2	naturalny
6583AA00	9	4	2.8	4.1	7.3	4.8	6.6	3.5	1	PA 66	UL94 V-2	naturalny
6584AA00	12	4	3.2	5.2	11.5	8.5	8.8	3.5	1.0 - 1.6	PA 66	UL94 V-2	naturalny
6585AA00	9.2	4	3.2	5.2	7.6	5	6.8	3	1.0 - 1.6	PA 66	UL94 V-2	naturalny