


FP-9899 - Wciskane uchwyty do kabli

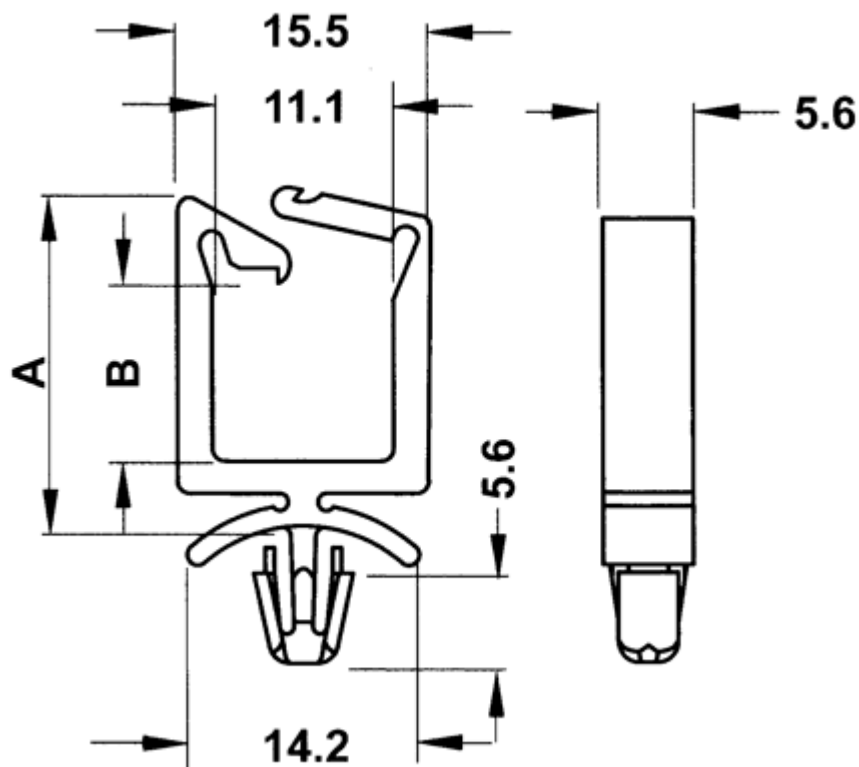

Dane techniczne:

- **Materiał:** PA 6.6 UL94V2
- **Kolor:** naturalny
- Temperatura pracy: -35°C - 85°C
- Opakowanie: 1000 szt.

Symbol	A	B	C	D	E	F	G	Zakres średnicy otworu montażowego	Zakres grubości panelu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
9899AA00	13	3.6	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
9900AA00	18	8.4	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
9901AA00	27.2	17.5	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
9902AA00	35.1	25.4	5.6	5.6	14.2	11.1	15.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	naturalny
9903AA00	13	3.6	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9904AA00	18	8.4	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9905AA00	27.2	17.5	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
9906AA00	35.1	25.4	5.6	5.6	14.2	11.1	15.5	4.8	2.6 - 3.6	PA 66	UL94 V-2	naturalny
6579AA00	18	10.3	5.4	5.2	14.8	10.8	14.8	4.8 - 5.0	0.5 - 2.0	PA 66	UL94 V-2	naturalny
6580AA00	27.2	19.6	5.4	5.2	14.8	10.8	14.8	4.8 - 5.0	0.5 - 2.0	PA 66	UL94 V-2	naturalny