
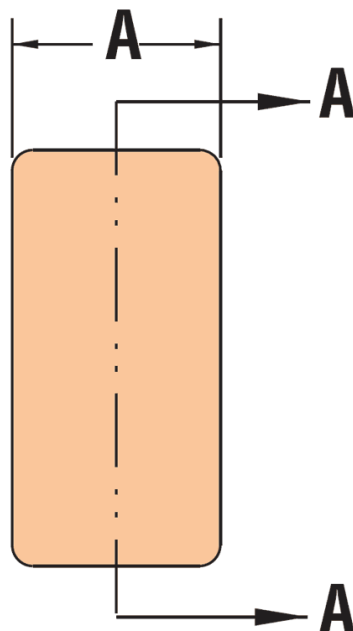


H-PZT - Żebrowane wkładki do rur prostokątnych

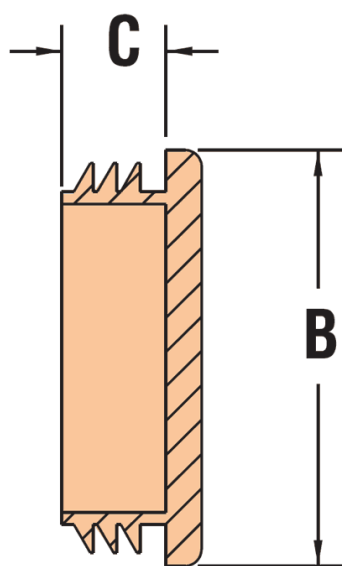

Dane techniczne:

- **Materiał:** LDPE
- **Kolor:** czarny
- Zakres temperatur: -70°C do 66°C

Symbol	Wymiary wkładki B × A	C	Zakres grubości ścianki rury	Moduł	Materiał	Kolor
	[mm]		[mm]			
H-G5330	25.4 × 12.7	10.9	1.24 - 1.65	16-18	LDPE	czarny
H-G5331	38.1 × 12.7	12.7	0.89 - 2.11	14-20	LDPE	czarny
H-G5332	28.6 × 15.9	10.9	0.89 - 2.11	14-20	LDPE	czarny
H-G5334	31.8 × 15.9	12.7	2.11	14	LDPE	czarny
H-G5335	34.9 × 15.9	10.9	0.89 - 2.11	14-20	LDPE	czarny
H-G5336	38.1 × 19.1	10.9	0.89 - 2.11	14-20	LDPE	czarny
H-G5337	31.8 × 25.4	12.7	0.89 - 2.11	14-20	LDPE	czarny
H-G5338	38.1 × 25.4	12.7	2.11 - 3.40	10-14	LDPE	czarny
H-G5339	38.1 × 25.4	12.7	0.89 - 2.11	14-20	LDPE	czarny
H-G5340	50.8 × 25.4	12.7	2.11 - 3.40	10-14	LDPE	czarny
H-G5341	50.8 × 25.4	12.7	0.89 - 2.11	14-20	LDPE	czarny
H-G5342	50.8 × 25.4	9.1	1.65	16	LDPE	czarny
H-G5343	63.5 × 25.4	11.4	0.89 - 2.11	14-20	LDPE	czarny
H-G5344	63.5 × 25.4	12.7	1.24 - 1.65	16-18	LDPE	czarny
H-G5345	76.2 × 25.4	13	0.89 - 2.11	14-20	LDPE	czarny
H-G5346	50.8 × 38.1	12.7	2.11 - 3.40	10-14	LDPE	czarny
H-G5347	63.5 × 38.1	13.5	1.65 - 2.77	12-16	LDPE	czarny
H-G5348	76.2 × 38.1	12.7	2.11 - 3.40	10-14	LDPE	czarny
H-G5349	88.9 × 38.1	15.2	2.11 - 3.40	10-14	LDPE	czarny
H-G5356	100.1 × 49.8	16.5	2.77 - 5.16	6-12	LDPE	czarny
H-G5351	63.5 × 50.8	13.2	2.11 - 3.40	10-14	LDPE	czarny
H-G5352	76.2 × 50.8	13.2	4.19 - 5.16	6-8	LDPE	czarny
H-G5353	76.2 × 50.8	13.2	2.11 - 3.40	10-14	LDPE	czarny
H-G5354	76.2 × 50.8	12.7	0.89 - 2.11	14-20	LDPE	czarny

Symbol	Wymiary wkładki B × A	C	Zakres grubości ścianki rury	Moduł	Materiał	Kolor
	[mm]	[mm]	[mm]			
H-G5355	101.6 × 50.8	23.9	3.05 - 5.16	6-11	LDPE	czarny
H-G5357	101.6 × 50.8	12.7	2.11 - 3.40	10-14	LDPE	czarny
H-G5358	101.6 × 50.8	12.7	0.89 - 2.11	14-20	LDPE	czarny
H-G5359 1	127 × 50.8	25.4	4.19	8	LDPE	czarny
H-G5360 1	127 × 50.8	25.4	3.4	10	LDPE	czarny