



H-RP - Zaślepki prostokątne

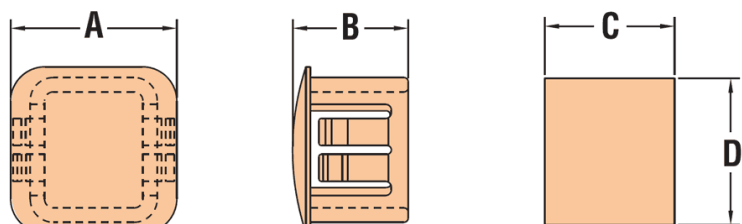

Otwór montażowy
Mounting hole

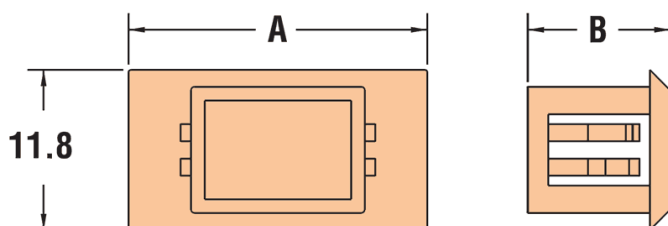

H-3299, H-3388, H-3389

Dane techniczne:

- **Materiał:** Nylon 6/6
- **Klasa palności:** UL94 V-2
- **Kolor:** czarny lub biały
- **H-13911 to przepustowa wersja zaślepki H-13910**
- Zakres temperatur: -40°C to 105°C

Symbol	Zakres grubości panelu	C	D	A	B	Materiał	Klasa palności
	[mm]	[mm]	[mm]	[mm]	[mm]		
H-13910	0.64 maks.	24.5	24.5	26.9 × 26.9	7.6	PA 66	UL94 V-2
H-13911	0.64 maks.	24.5	24.5	26.7 × 26.7	7.6	PA 66	UL94 V-2
H-2512	1.0 maks.	6.9	7.4	9.4 × 9.4	8.4	PA 66	UL94 V-2
H-1890	2.5 maks.	11.5	13.9	14.7 × 14.7	10.2	PA 66	UL94 V-2
H-1892	4.0 maks.	17.5	17.5	21.1 × 21.1	11.9	PA 66	UL94 V-2
H-3299	3.5 maks.	9.5	13	16	10.5	PA 66	UL94 V-2
H-3388	3.5 maks.	9.5	13	22	10.5	PA 66	UL94 V-2
H-3389	3.5 maks.	9.5	26	35	10.5	PA 66	UL94 V-2