


L-BW-8-21 - Tulejka dystansowa nylonowa sześciokątna wciskana w otwór

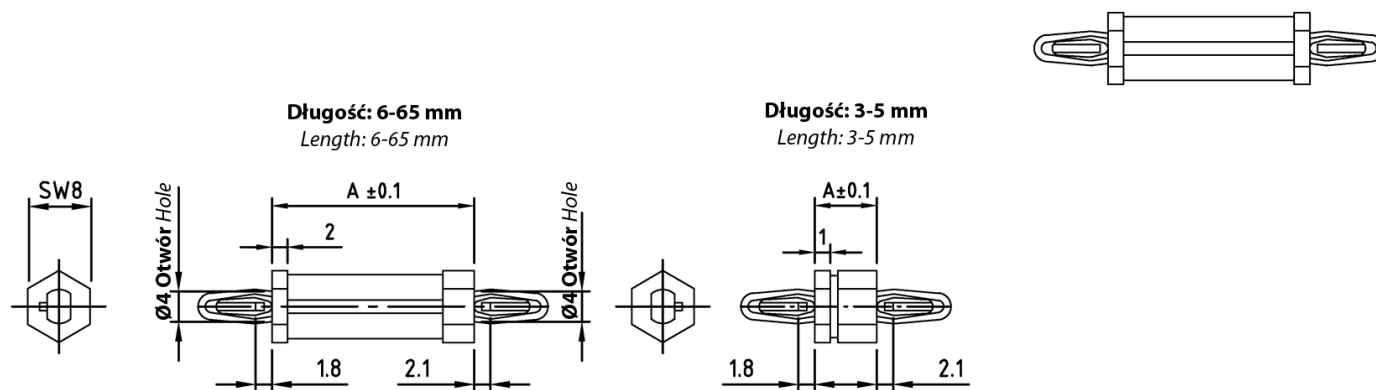

Dane techniczne:

- **Materiał:** PA
- **Klasa palności:** UL94 V-2
- **Kolor:** czarny
- **Opakowanie:** 100 szt.

Symbol	Wysokość A	Średn. otworu górnego	Średn. otworu dolnego	Grubość panelu górnego	Grubość panelu dolnego
	[mm]	[mm]	[mm]	[mm]	[mm]
L-BW-8-21-03	3	4	4	1.8	2.1
L-BW-8-21-04	4	4	4	1.8	2.1
L-BW-8-21-05	5	4	4	1.8	2.1
L-BW-8-21-06	6	4	4	1.8	2.1
L-BW-8-21-07	7	4	4	1.8	2.1
L-BW-8-21-08	8	4	4	1.8	2.1
L-BW-8-21-09	9	4	4	1.8	2.1
L-BW-8-21-10	10	4	4	1.8	2.1
L-BW-8-21-11	11	4	4	1.8	2.1
L-BW-8-21-12	12	4	4	1.8	2.1
L-BW-8-21-13	13	4	4	1.8	2.1
L-BW-8-21-14	14	4	4	1.8	2.1
L-BW-8-21-15	15	4	4	1.8	2.1
L-BW-8-21-16	16	4	4	1.8	2.1
L-BW-8-21-17	17	4	4	1.8	2.1
L-BW-8-21-18	18	4	4	1.8	2.1
L-BW-8-21-19	19	4	4	1.8	2.1
L-BW-8-21-20	20	4	4	1.8	2.1
L-BW-8-21-21	21	4	4	1.8	2.1
L-BW-8-21-22	22	4	4	1.8	2.1
L-BW-8-21-23	23	4	4	1.8	2.1
L-BW-8-21-24	24	4	4	1.8	2.1
L-BW-8-21-25	25	4	4	1.8	2.1

Symbol	Wysokość A	Średn. otworu górnego	Średn. otworu dolnego	Grubość panelu górnego	Grubość panelu dolnego
	[mm]	[mm]	[mm]	[mm]	[mm]
L-BW-8-21-26	26	4	4	1.8	2.1
L-BW-8-21-27	27	4	4	1.8	2.1
L-BW-8-21-28	28	4	4	1.8	2.1
L-BW-8-21-29	29	4	4	1.8	2.1
L-BW-8-21-30	30	4	4	1.8	2.1
L-BW-8-21-31	31	4	4	1.8	2.1
L-BW-8-21-32	32	4	4	1.8	2.1
L-BW-8-21-33	33	4	4	1.8	2.1
L-BW-8-21-34	34	4	4	1.8	2.1
L-BW-8-21-35	35	4	4	1.8	2.1
L-BW-8-21-36	36	4	4	1.8	2.1
L-BW-8-21-37	37	4	4	1.8	2.1
L-BW-8-21-38	38	4	4	1.8	2.1
L-BW-8-21-39	39	4	4	1.8	2.1
L-BW-8-21-40	40	4	4	1.8	2.1
L-BW-8-21-41	41	4	4	1.8	2.1
L-BW-8-21-42	42	4	4	1.8	2.1
L-BW-8-21-43	43	4	4	1.8	2.1
L-BW-8-21-44	44	4	4	1.8	2.1
L-BW-8-21-45	45	4	4	1.8	2.1
L-BW-8-21-46	46	4	4	1.8	2.1
L-BW-8-21-47	47	4	4	1.8	2.1
L-BW-8-21-48	48	4	4	1.8	2.1
L-BW-8-21-49	49	4	4	1.8	2.1
L-BW-8-21-50	50	4	4	1.8	2.1
L-BW-8-21-51	51	4	4	1.8	2.1
L-BW-8-21-52	52	4	4	1.8	2.1
L-BW-8-21-53	53	4	4	1.8	2.1
L-BW-8-21-54	54	4	4	1.8	2.1
L-BW-8-21-55	55	4	4	1.8	2.1
L-BW-8-21-56	56	4	4	1.8	2.1
L-BW-8-21-57	57	4	4	1.8	2.1
L-BW-8-21-58	58	4	4	1.8	2.1
L-BW-8-21-59	59	4	4	1.8	2.1
L-BW-8-21-60	60	4	4	1.8	2.1
L-BW-8-21-61	61	4	4	1.8	2.1
L-BW-8-21-62	62	4	4	1.8	2.1
L-BW-8-21-63	63	4	4	1.8	2.1
L-BW-8-21-64	64	4	4	1.8	2.1
L-BW-8-21-65	65	4	4	1.8	2.1