


LWS-A - Uchwyt kablowy

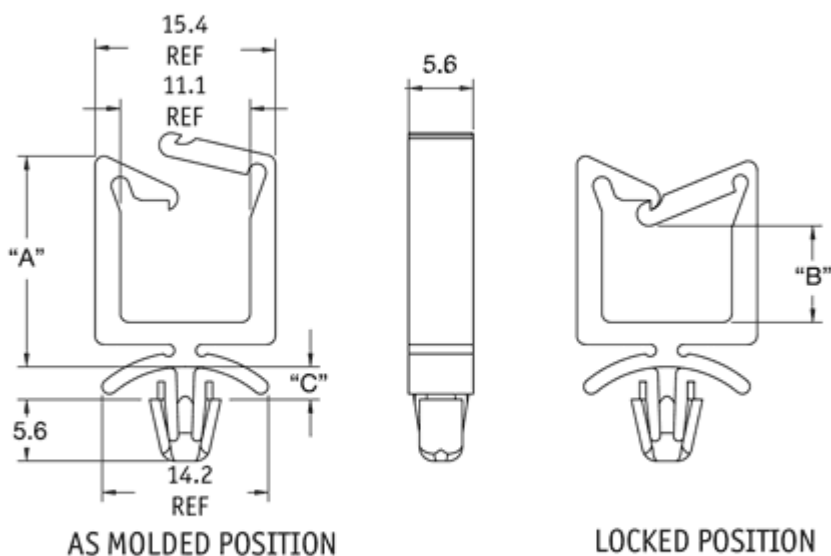

Dane techniczne:

- **Materiał:** Nylon 6/6, UL 94 V-2, RMS-01* lub Nylon 6/6, UL 94 V-0, RMS-19*
- **Kolor:** naturalny
- Minimum zakupu: 1000 szt.

Symbol	A	B	C	Średnica otworu montażowego	Grubość panelu	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]			
LWS-A-1-01	13.2	3.6	2.8	4.75	1.6	PA 66	UL94 V-2	naturalny
LWS-A-1-19	13.2	3.6	2.8	4.75	1.6	PA 66	UL94 V-0	naturalny
LWS-A-2-1-01	13.2	3.6	3.8	4.75	3.2	PA 66	UL94 V-2	naturalny
LWS-A-2-1-19	13.2	3.6	3.8	4.75	3.2	PA 66	UL94 V-0	naturalny
LWS-A-2-01	18	8.4	2.8	4.75	1.6	PA 66	UL94 V-2	naturalny
LWS-A-2-19	18	8.4	2.8	4.75	1.6	PA 66	UL94 V-0	naturalny
LWS-A-2-2-01	18	8.4	3.8	4.75	3.2	PA 66	UL94 V-2	naturalny
LWS-A-2-2-19	18	8.4	3.8	4.75	3.2	PA 66	UL94 V-0	naturalny
LWS-A-3-01	27.2	17.5	2.8	4.75	1.6	PA 66	UL94 V-2	naturalny
LWS-A-3-19	27.2	17.5	2.8	4.75	1.6	PA 66	UL94 V-0	naturalny
LWS-A-2-3-01	27.2	17.5	3.8	4.75	3.2	PA 66	UL94 V-2	naturalny
LWS-A-2-3-19	27.2	17.5	3.8	4.75	3.2	PA 66	UL94 V-0	naturalny
LWS-A-4-01	35	25.4	2.8	4.75	1.6	PA 66	UL94 V-2	naturalny
LWS-A-4-19	35	25.4	2.8	4.75	1.6	PA 66	UL94 V-0	naturalny
LWS-A-2-4-01	35	25.4	3.8	4.75	3.2	PA 66	UL94 V-2	naturalny
LWS-A-2-4-19	35	25.4	3.8	4.75	3.2	PA 66	UL94 V-0	naturalny