


M-NS80 - Stopka wkręcana nastawna stalowa 10°

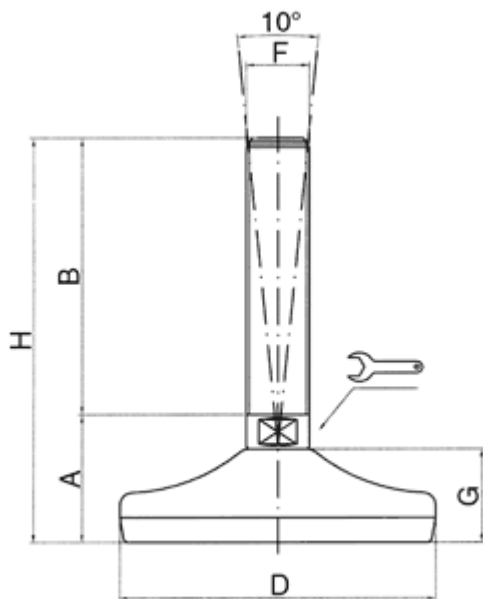

Dane techniczne:

- **Materiał:** stal nierdzewna
- Średnica podstawy: 80 mm
- Maks. obciążenie statyczne: 10000 N

Symbol	A	Długość sworznia B	Średnica podstawy D	Rozmiar klucza	Gwint metryczny F	Wysokość podstawy G	Wysokość H
	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
M-NS80-M10-050	35	50	80	14	M10	25	85
M-NS80-M10-075	35	75	80	14	M10	25	110
M-NS80-M10-100	35	100	80	14	M10	25	135
M-NS80-M10-125	35	125	80	14	M10	25	160
M-NS80-M12-050	35	50	80	14	M12	25	85
M-NS80-M12-075	35	75	80	14	M12	25	110
M-NS80-M12-100	35	100	80	14	M12	25	135
M-NS80-M12-125	35	125	80	14	M12	25	160
M-NS80-M12-150	35	150	80	14	M12	25	185
M-NS80-M14-075	35	75	80	14	M14	25	110
M-NS80-M14-100	35	100	80	14	M14	25	135
M-NS80-M14-125	35	125	80	14	M14	25	160
M-NS80-M14-150	35	150	80	14	M14	25	185
M-NS80-M14-175	35	175	80	14	M14	25	210
M-NS80-M16-075	38	75	80	13	M16	25	113
M-NS80-M16-100	38	100	80	13	M16	25	138
M-NS80-M16-125	38	125	80	13	M16	25	163
M-NS80-M16-150	38	150	80	13	M16	25	188
M-NS80-M16-175	38	175	80	13	M16	25	213
M-NS80-M16-200	38	200	80	13	M16	25	235
M-NS80-M20-075	38	75	80	17	M20	25	113
M-NS80-M20-100	38	100	80	17	M20	25	138
M-NS80-M20-125	38	125	80	17	M20	25	163

Symbol	A	Długość sworznia B	Średnica podstawy D	Rozmiar klucza	Gwint metryczny F	Wysokość podstawy G	Wysokość H
	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]
M-NS80-M20-150	38	150	80	17	M20	25	188
M-NS80-M20-175	38	175	80	17	M20	25	213
M-NS80-M20-200	38	200	80	17	M20	25	238
M-NS80-M20-225	38	225	80	17	M20	25	260
M-NS80-M20-250	38	250	80	17	M20	25	285
M-NS80-M24-075	40	75	80	20	M24	25	115
M-NS80-M24-100	40	100	80	20	M24	25	140
M-NS80-M24-125	40	125	80	20	M24	25	165
M-NS80-M24-150	40	150	80	20	M24	25	190
M-NS80-M24-175	40	175	80	20	M24	25	215
M-NS80-M24-200	40	200	80	20	M24	25	240
M-NS80-M24-225	40	225	80	20	M24	25	265