

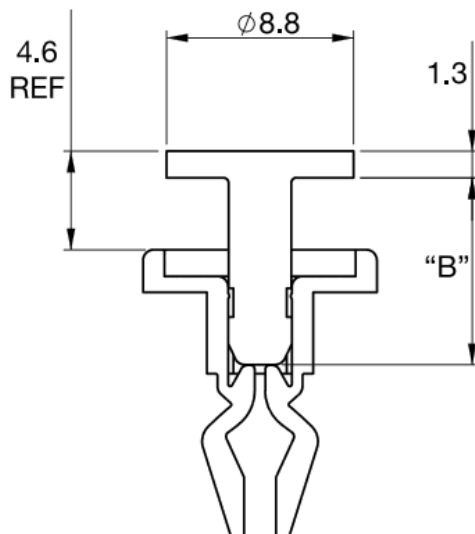


RFL - Nit składany

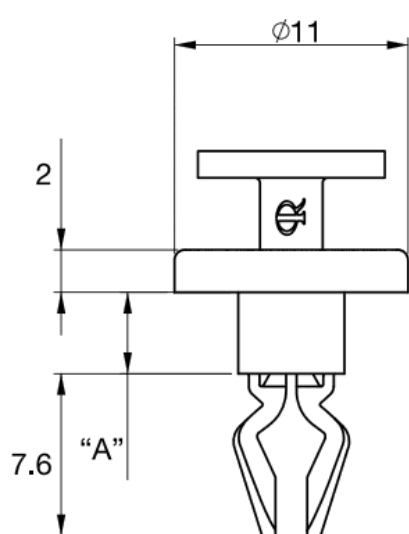

Closed Locked Position

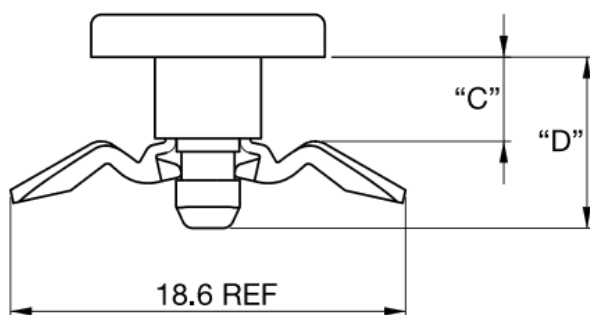

Dane techniczne:

- **UL94 V2 Nylon 6/6, RMS-01**
- Minimum zakupu: 1000 szt.

Symbol	A	B	C	D	Zakres grubości panelu	Średnica otworu montażowego	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
RFL-1	3	8.1	2.7	7.4	2.85 - 3.85	5.5	PA 66	UL94 V-2	naturalny
RFL-1BK	3	8.1	2.7	7.4	2.85 - 3.85	5.5	PA 66	UL94 V-2	czarny
RFL-2	3.7	8.8	3.3	8.1	3.55 - 4.55	5.5	PA 66	UL94 V-2	naturalny
RFL-2BK	3.7	8.8	3.3	8.1	3.55 - 4.55	5.5	PA 66	UL94 V-2	czarny