


RSFS - Prowadnica do płytek drukowanych PCB

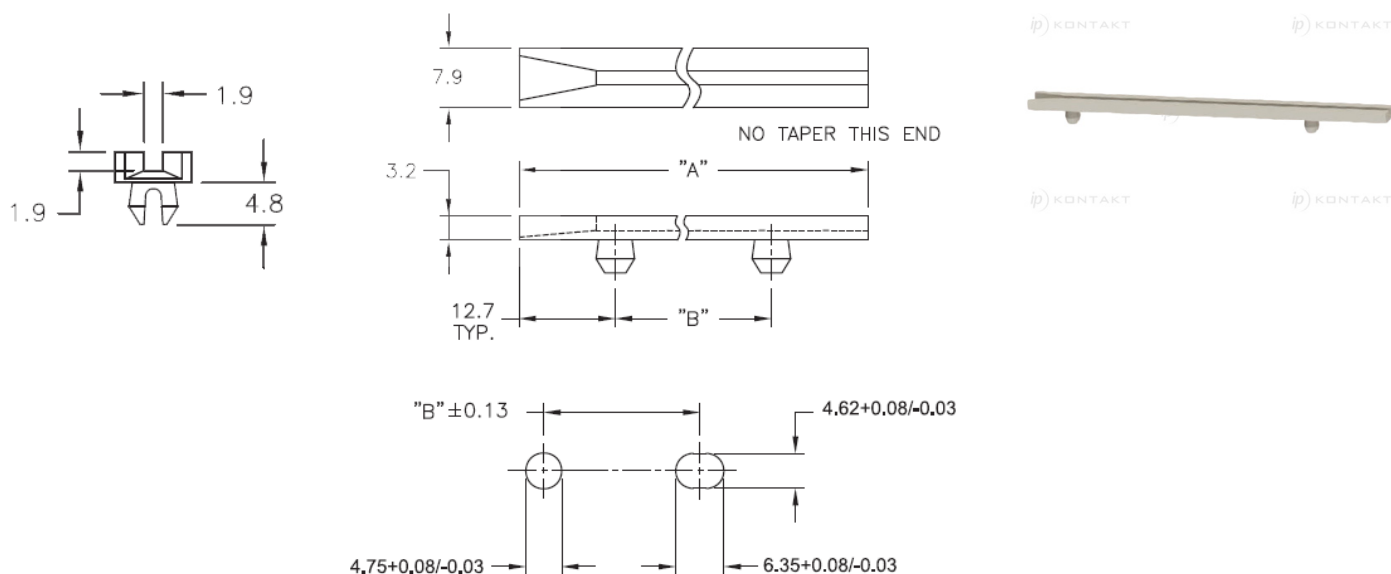

Dane techniczne:

- **Nylon 6/6, UL 94 V-0, RMS-48 ***
- **Kolor:** naturalny - NAT
- Do płytek PCB: 1.6
- Minimum zakupu: 500 szt.

Symbol	Długość A	B ±0.63	C	D	E	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]			
RSFS-250	63.5	38.1	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-300	76.2	50.8	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-350	88.9	63.5	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-400	101.6	76.2	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-450	114.3	76.2	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-451	114.3	88.9	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-500	127	101.6	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-550	139.7	114.3	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-600	152.4	127	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-650	164.1	127.5	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-651	164.1	139.7	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-700	177.8	152.4	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-750	190.5	165.1	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny
RSFS-800	203.2	177.8	3.2	1.9	4.8	PA 66	UL94 V-0	naturalny