


SRCS - Nity niezapadające

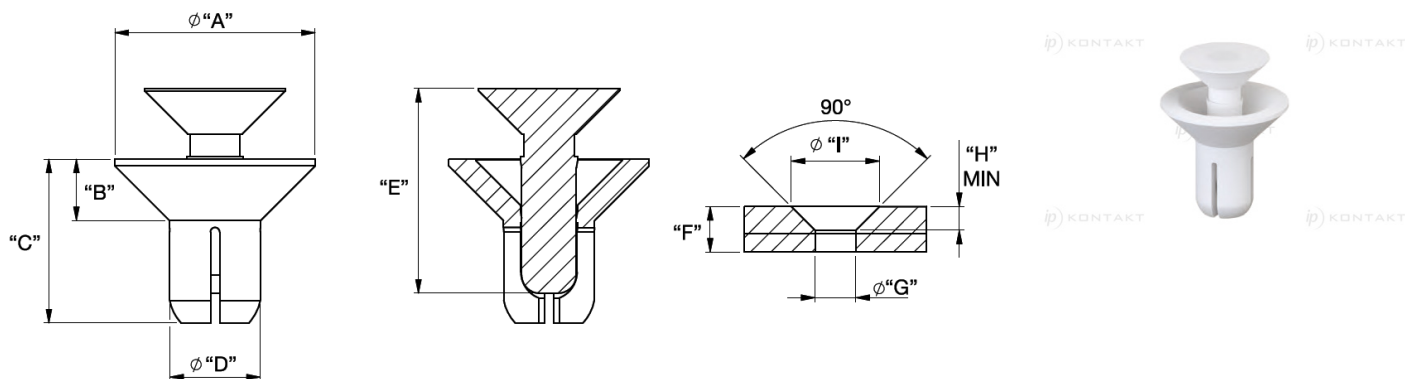

Dane techniczne:

- **UL94 V2 Nylon 6, RMS-52**
- Minimum zakupu: 1000 szt.

Symbol	A	B	C	D	E	Zakres grubości panelu F	Zakres średnicy otworu montażowego G	H	I	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
SRCS-4060B	8.8	2.7	6	4	7.1	3.5 - 4.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	czarny
SRCS-4060W	8.8	2.7	6	4	7.1	3.5 - 4.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	biały
SRCS-4070B	8.8	2.7	7.2	4	9	4.5 - 5.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	czarny
SRCS-4070W	8.8	2.7	7.2	4	9	4.5 - 5.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	biały
SRCS-4080B	8.8	2.7	8	4	9	5.5 - 6.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	czarny
SRCS-4080W	8.8	2.7	8	4	9	5.5 - 6.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	biały
SRCS-4090B	8.8	2.7	9	4	11	6.5 - 7.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	czarny
SRCS-4090W	8.8	2.7	9	4	11	6.5 - 7.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	biały
SRCS-4100B	8.8	2.7	10	4	11	7.5 - 8.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	czarny
SRCS-4100W	8.8	2.7	10	4	11	7.5 - 8.5	4.1 - 4.2	2.6	9.4	PA 6	UL94 V-2	biały
SRCS-5065B	9.8	2.7	6.5	5	8.5	3.5 - 4.5	5.1 - 5.2	2.6	10.4	PA 6	UL94 V-2	czarny
SRCS-5065W	9.8	2.7	6.5	5	8.5	3.5 - 4.5	5.1 - 5.2	2.6	10.4	PA 6	UL94 V-2	biały