
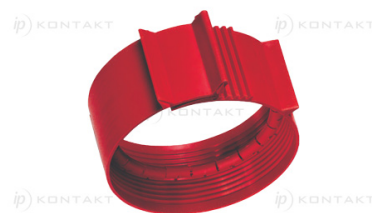


## TM-SSR - Pierścień przeciwbryzgowy

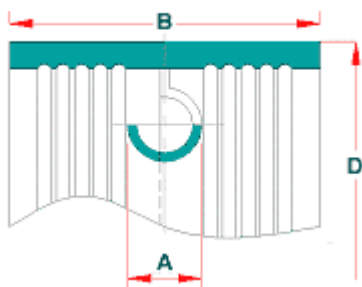

### Dane techniczne:

- **Materiał:** POLYPROPYLEN\*
- **Kolor:** czerwony

| Symbol        | Zakres średnicy kołnierza<br>D | A    | B    | ANSI     | PN          | Opakowanie |
|---------------|--------------------------------|------|------|----------|-------------|------------|
|               | [mm]                           | [mm] | [mm] |          |             | [szt./pcs] |
| TM-SSR DN 15  | 95                             | 7    | 50   |          | 10-16-25-40 | 100        |
| TM-SSR DN 20  | 105 - 108                      | 7    | 50   | 1" - 150 | 10-16-25-40 | 100        |
| TM-SSR DN 25  | 115                            | 7    | 50   |          | 10-16-25-40 | 80         |
| TM-SSR DN 32  | 140                            | 7    | 50   |          | 10-16-25-40 | 60         |
| TM-SSR DN 40  | 150 - 152.4                    | 7    | 50   | 2" - 150 | 10-16-25-40 | 50         |
| TM-SSR DN 50  | 165                            | 9    | 50   |          | 10-16-25-40 | 40         |
| TM-SSR DN 65  | 185 - 190.5                    | 9    | 50   | 3" - 150 | 10-16-25-40 | 30         |
| TM-SSR DN 80  | 200                            | 9    | 50   |          | 10-16-25-40 | 30         |
| TM-SSR DN 100 | 220 - 228.6                    | 9    | 50   | 4" - 150 | 10-16       | 28         |
| TM-SSR DN 125 | 250                            | 9    | 50   |          | 10-16       | 15         |
| TM-SSR DN 150 | 285 - 279.4                    | 9    | 50   | 6" - 150 | 10-16       | 12         |
| TM-SSR DN 200 | 340 - 342.9                    | 13   | 60   | 8" - 150 | 10-16       | 8          |