


TRM - Plastikowy nit, zaślepka, zatrzask

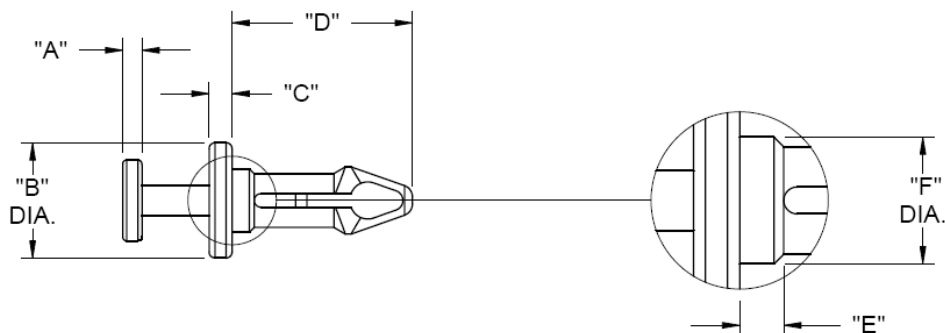

Dane techniczne:

- **Nylon 6/6 Heat Stabilized, UL 94 V-2, RMS-47 ***
- **Kolor:** czarny - BLK
- Minimum zakupu: 1 000 szt.

Symbol	Zakres średnicy otworu montażowego	Zakres grubości panelu	A ±0.25	B ±0.25	C ±0.25	D ±0.25	E	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
TRM-1	2.5 - 2.6	4.1 - 4.6	1	4.8	1.5	8.8	-	PA 66	UL94 V-2	czarny
TRM-2	2.7 - 2.8	2.0 - 2.7	1.3	5.5	1.5	7.6	-	PA 66	UL94 V-2	czarny
TRM-3	3.1 - 3.3	2.7 - 3.3	1.3	5.5	1.5	8.1	-	PA 66	UL94 V-2	czarny
TRM-4	3.1 - 3.3	3.3 - 3.9	1.3	5.5	1.5	7.6	-	PA 66	UL94 V-2	czarny
TRM-5	3.1 - 3.3	3.9 - 4.6	1.3	5.5	1.5	9.4	-	PA 66	UL94 V-2	czarny
TRM-6	3.1 - 3.3	6.1 - 6.7	1.3	5.5	1.5	11.6	-	PA 66	UL94 V-2	czarny
TRM-7	3.7 - 3.9	6.7 - 7.4	1.3	7.6	1.5	11.9	1.1	PA 66	UL94 V-2	czarny