


WSLT - Uchwyt kablowy - zatrzaskowy

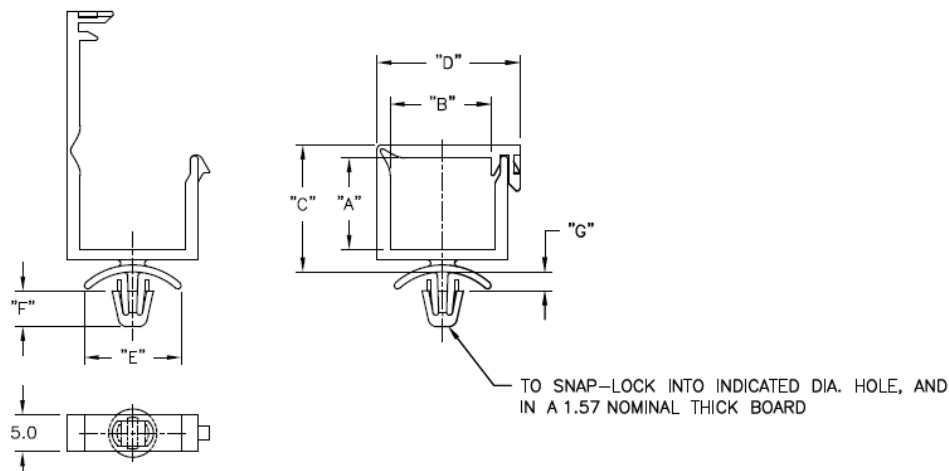

Dane techniczne:

- **Materiał:** Nylon 6/6, UL 94 V-2, RMS-01* lub Nylon 6/6, UL 94 V-0, RMS-19*
- **Kolor:** naturalny - NAT
- Minimum zakupu: 1000 szt.

Symbol	A	B	C	D	E	F	G	Średnica otworu montażowego	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
WSLT-3.5-2-1-01	3.4	13.5	8.9	19.6	9.5	3	2.5	3.5	PA 66	UL94 V-2	naturalny
WSLT-3.5-2-1-19	3.4	13.5	8.9	19.6	9.5	3	2.5	3.5	PA 66	UL94 V-0	naturalny
WSLT-02-1-01	3.4	13.5	9.4	19.6	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-02-1-19	3.4	13.5	9.4	19.6	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny
WSLT-01A-01	4.8	10.7	10.6	16.8	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-01A-19	4.8	10.7	10.6	16.8	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny
WSLT-01-2-01	8.8	10.7	14.6	16.8	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-01-2-19	8.8	10.7	14.6	16.8	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny
WSLT-02A-01	10	16.3	15.8	22.4	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-02A-19	10	16.3	15.8	22.4	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny
WSLT-03-2-01	14.1	16.3	19.6	22.4	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-03-2-19	14.1	16.3	19.6	22.4	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny
WSLT-03-3-01	21.7	18	27.3	24.1	14.3	5.6	2.8	4.75	PA 66	UL94 V-2	naturalny
WSLT-03-3-19	21.7	18	27.3	24.1	14.3	5.6	2.8	4.75	PA 66	UL94 V-0	naturalny