


WSLT-9 - Uchwyt kablowy - zatrzaskowy

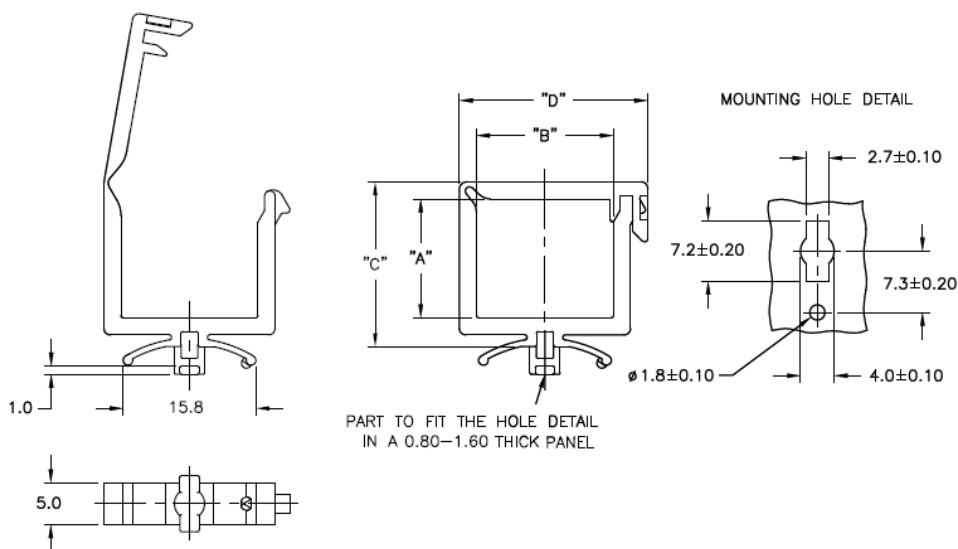

Dane techniczne:

- **Nylon 6/6, UL 94 V-2, RMS-01 ***
- **Kolor:** naturalny - NAT
- **Nylon 6/6, UL 94 V-0, RMS-19 ***
- **Kolor:** naturalny - NAT
- Montaż/demontaż jednym ruchem
- Minimum zakupu: 1000 szt.

Symbol	A	B	C	D	Materiał	Klasa palności	Kolor
	[mm]	[mm]	[mm]	[mm]			
WSLT-9-01A-01	4.8	10.7	10.2	16.8	PA 66	UL94 V-2	naturalny
WSLT-9-01A-19	4.8	10.7	10.2	16.8	PA 66	UL94 V-0	naturalny
WSLT-9-01-2-01	9.1	10.7	14.4	16.8	PA 66	UL94 V-2	naturalny
WSLT-9-01-2-19	9.1	10.7	14.4	16.8	PA 66	UL94 V-0	naturalny
WSLT-9-02-1-01	3.6	13.5	9.1	19.6	PA 66	UL94 V-2	naturalny
WSLT-9-02-1-19	3.6	13.5	9.1	19.6	PA 66	UL94 V-0	naturalny
WSLT-9-02A-1-01	10	16.3	15.2	22.4	PA 66	UL94 V-2	naturalny
WSLT-9-02A-1-19	10	16.3	15.2	22.4	PA 66	UL94 V-0	naturalny
WSLT-9-03-2-01	14.1	16.3	19.2	22.4	PA 66	UL94 V-2	naturalny
WSLT-9-03-2-19	14.1	16.3	19.2	22.4	PA 66	UL94 V-0	naturalny
WSLT-9-03-3-01	21.7	18	26.8	24.1	PA 66	UL94 V-2	naturalny
WSLT-9-03-3-19	21.7	18	26.8	24.1	PA 66	UL94 V-0	naturalny