
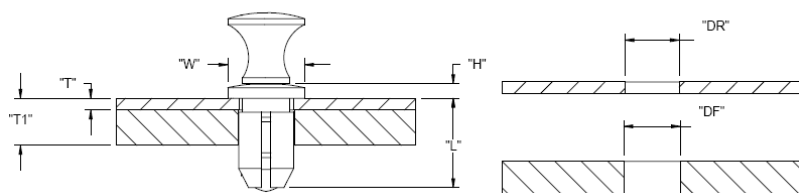
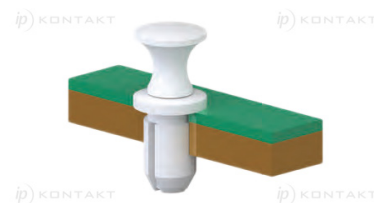


## SLG / SLPL / SLPB - Snap Latch

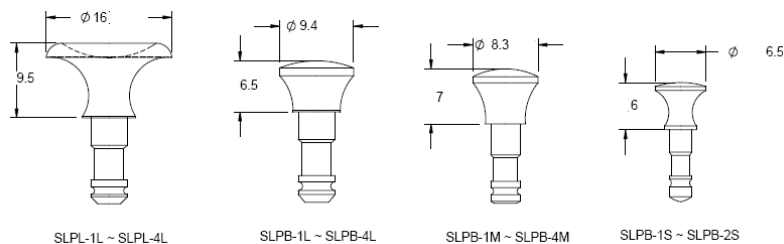

### Details:

- **Material: Plunger; UL94V2 Nylon 6, RMS-120\***
- **Grommet; UL94 V2 Polycarbonate, RMS-72\***
- **Colour: black (BLK), white (WH)**
- To install, push the grommet into the removable panel and then the desired plunger into the grommet. When the panel and plunger are pushed into the fixed panel, it locks them together
- Simply pull on the plunger to remove the non-fixed panel
- Grommet and mating plunger are sold separately
- Standard Pack: 1000/Bag

| Part No. | Color | W    | H   | L    | T<br>Removable<br>panel<br>thickness | T1<br>Total<br>panel<br>thickness | Removable panel hole<br>diameter range DR | Fixed panel hole<br>diameter range DF | Mating<br>Plunger<br>Part No. | Alternate<br>Mating Plunger<br>Part No. |
|----------|-------|------|-----|------|--------------------------------------|-----------------------------------|-------------------------------------------|---------------------------------------|-------------------------------|-----------------------------------------|
|          |       | [mm] |     |      |                                      |                                   |                                           |                                       |                               |                                         |
| SLG-2L-B | BLK   | 10.8 | 2.0 | 10.0 | 2.5                                  | 3 - 5.2                           | 7.5 - 7.7                                 | 8 - 8.2                               | SLPB-2L-B                     | SLPL-2L-B                               |