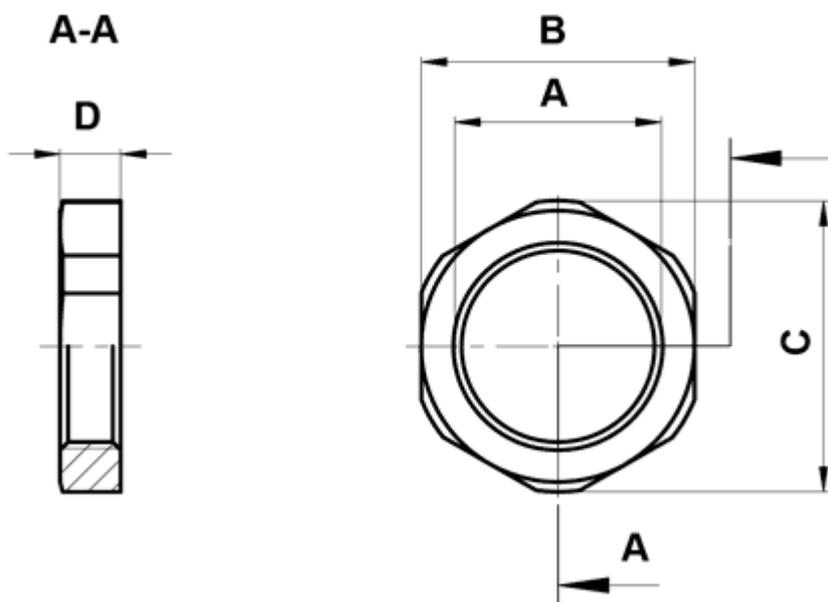# FP-8641 - Metric thread hexagonal locknuts

Details:

- **Material: Nylon 6 GV**
- **Matrial: PA 6**
- **Flammability: UL94HB**
- **Color: dark grey (RAL 7001), light grey (RAL 7035), black (RAL 9005)**
- Meric as per EN 60423
- Working temperature: -20°C to +100°C

Symbol	Metric thread A	Wrench size B	C	D	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]				[szt./pcs]
8641BB117001	M12×1.5	17	19	5	PA 6 + GF	UL94 HB	dark grey	100
8608BB019005	M12×1.5	17	19	5	PA 6 + GF	UL94 HB	black	100
8616BB117035	M12×1.5	17	19	5	PA 6 + GF	UL94 HB	light grey	100
8609BB019005	M16×1.5	22	25	5	PA 6 + GF	UL94 HB	black	100
8617BB117035	M16×1.5	22	25	5	PA 6 + GF	UL94 HB	light grey	100
8642BB117001	M16×1.5	22	25	5	PA 6 + GF	UL94 HB	dark grey	100
8643BB117001	M20×1.5	27	30	6	PA 6 + GF	UL94 HB	dark grey	100
8610BB019005	M20×1.5	27	30	6	PA 6 + GF	UL94 HB	black	100
8618BB117035	M20×1.5	27	30	6	PA 6 + GF	UL94 HB	light grey	100
8644BB117001	M25×1.5	32	36	6	PA 6 + GF	UL94 HB	dark grey	100
8611BB019005	M25×1.5	32	36	6	PA 6 + GF	UL94 HB	black	100
8619BB117035	M25×1.5	32	36	6	PA 6 + GF	UL94 HB	light grey	100
8612BB019005	M32×1.5	41	46	7	PA 6 + GF	UL94 HB	black	100
8620BB117035	M32×1.5	41	46	7	PA 6 + GF	UL94 HB	light grey	100
8645BB117001	M32×1.5	41	46	7	PA 6 + GF	UL94 HB	dark grey	100

Symbol	Metric thread A	Wrench size B	C	D	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]				[szt./pcs]
8621BB117035	M40×1.5	50	54	7	PA 6 + GF	UL94 HB	light grey	50
8646BB117001	M40×1.5	50	54	7	PA 6 + GF	UL94 HB	dark grey	50
8613BB019005	M40×1.5	50	54	7	PA 6 + GF	UL94 HB	black	50
8622AA117035	M50×1.5	60	67	8	PA 6	UL94 V-2	light grey	50
8647AA117001	M50×1.5	60	67	8	PA 6	UL94 V-2	dark grey	50
8614AA019005	M50×1.5	60	67	8	PA 6	UL94 V-2	black	50
8623AA117035	M63×1.5	75	83	8	PA 6	UL94 V-2	light grey	50
11442AA117001	M63×1.5	75	83	8	PA 6	UL94 V-2	dark grey	50
8615AA019005	M63×1.5	75	83	8	PA 6	UL94 V-2	black	50