


FP-9045 - PG thread snap-fit IP67 protection grommets

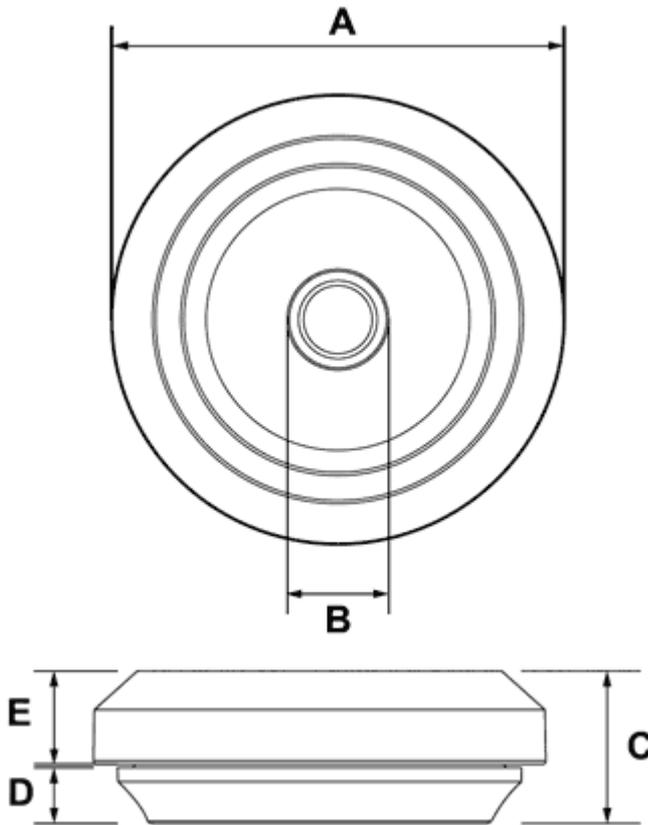

Details:

- **Material: TPE**
- **Material available on special order: TPE V0**
- **Color: light grey (RAL 7035), black (RAL 9005), white (RAL 9010)**
- Working temperature: -40°C do +110°C
- International Protection Marking: IP67
- SEMKO conformity
- Standard pack: 500 pcs

Symbol	Thread	Cable diameter range	Mounting hole diameter	Panel thickness range	Ext. diameter A ¹	B	C	D	E ¹	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
9045PF117035	PG9	5 - 10	16	0.5 - 3	24	4	11	4	6.7	TPE	light gray
9045PF019005	PG9	5 - 10	16	0.5 - 3	24	4	11	4	6.7	TPE	black
9045PF029010	PG9	5 - 10	16	0.5 - 3	24	4	11	4	6.7	TPE	white
9046PF117035	PG11	6 - 12	19	0.5 - 3	26	5	11	4	6.7	TPE	light gray
9046PF019005	PG11	6 - 12	19	0.5 - 3	26	5	11	4	6.7	TPE	black
9046PF029010	PG11	6 - 12	19	0.5 - 3	26	5	11	4	6.7	TPE	white
9047PF117035	PG16	8 - 15	23	0.5 - 3.5	30	7	11	4	6.7	TPE	light gray
9047PF019005	PG16	8 - 15	23	0.5 - 3.5	30	7	11	4	6.7	TPE	black
9047PF029010	PG16	8 - 15	23	0.5 - 3.5	30	7	11	4	6.7	TPE	white
9048PF117035	PG21	10 - 20	29	0.5 - 4.5	36	9	11	4	6.7	TPE	light gray
9048PF019005	PG21	10 - 20	29	0.5 - 4.5	36	9	11	4	6.7	TPE	black
9048PF029010	PG21	10 - 20	29	0.5 - 4.5	36	9	11	4	6.7	TPE	white
9049PF117035	PG28	18 - 27	38	1.5 - 4.5	45	17	13.5	4.8	7.4	TPE	light gray

Symbol	Thread	Cable diameter range	Mounting hole diameter	Panel thickness range	Ext. diameter A ¹	B	C	D	E ¹	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
9049PF019005	PG28	18 - 27	38	1.5 - 4.5	45	17	13.5	4.8	7.4	TPE	black
9049PF029010	PG28	18 - 27	38	1.5 - 4.5	45	17	13.5	4.8	7.4	TPE	white

¹ - może się zmieniać w zależności od materiału w którym jest montowany