
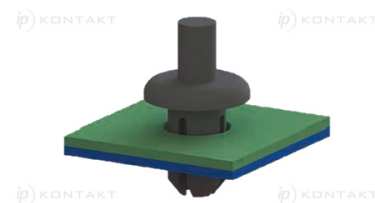


FP-9747 - Snap rivets

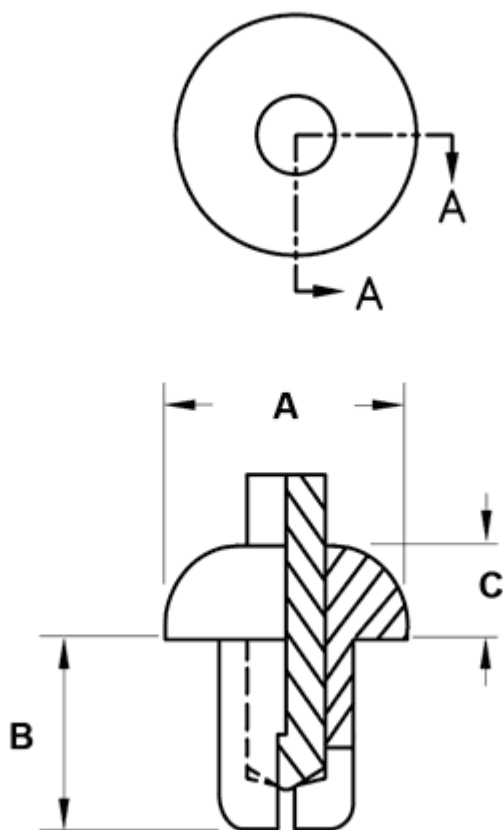

Details:

- **Material:** Nylon 6
- **Color:** black, white on special order
- Flammability: UL94V2
- Working temperature: -35°C do +85°C
- Standard pack 1000 pcs

Symbol	A	B	C	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
9747AA01	5.8	4.6	2	3.1	2.0 - 3.0	PA 6	UL94 V-2	black
9748AA01	5.8	5.6	2	3.1	3.0 - 4.1	PA 6	UL94 V-2	black
9749AA01	8.1	5.1	2.2	4.1	2.0 - 3.5	PA 6	UL94 V-2	black
9750AA01	8.1	6.1	2.2	4.1	3.5 - 4.5	PA 6	UL94 V-2	black
9751AA01	9.9	5.1	3.3	4.8	1.3 - 3.0	PA 6	UL94 V-2	black
9752AA01	9.4	5.1	2.8	5.1	2.0 - 3.0	PA 6	UL94 V-2	black
9753AA01	9.4	6.1	2.8	5.1	3.0 - 4.0	PA 6	UL94 V-2	black
9754AA01	9.4	7.1	2.8	5.1	4.0 - 5.0	PA 6	UL94 V-2	black
9755AA01	9.4	8.1	2.8	5.1	5.0 - 6.0	PA 6	UL94 V-2	black
9756AA01	9.4	8.9	2.8	5.1	6.0 - 7.0	PA 6	UL94 V-2	black
9757AA01	9.4	9.9	2.8	5.1	7.0 - 8.0	PA 6	UL94 V-2	black
9907AA01	17	15.5	5.5	8.6	6.0 - 11.0	PA 6	UL94 V-2	black
9908AA01	17	21	5.5	8.6	12.0 - 17.0	PA 6	UL94 V-2	black