
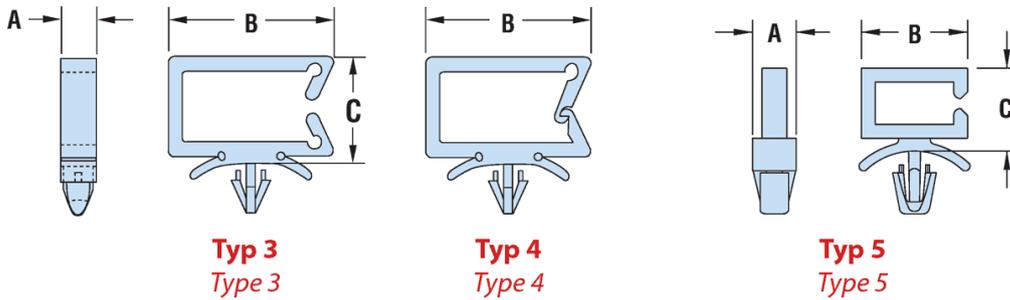


H-CH-3 - Cable Holders - Arrowhead Mount

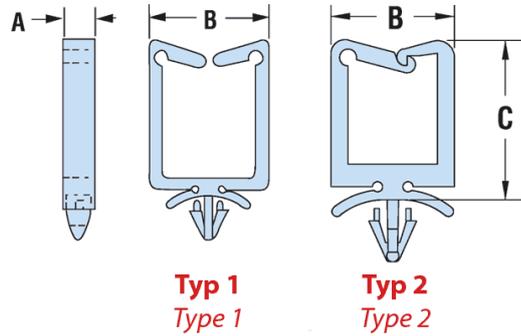

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Material Nylon 6/6 UL94 V-0 available on special order**
- **Colour: natural, black, white**
- Temperature Range: 0°C do 85°C
- Type 1 and 2 Recognized under UL File E54523

Symbol	Wire width	Wire height	C	A	B	Mounting hole diameter	Panel thickness range	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
H-3596	20.3	12.7	19.6	5.5	23.6	4.8	1.2 max.	1	PA 66	UL94 V-2	natural
H-3597	20.3	21.6	28.4	5.5	23.6	4.8	1.2 max.	1	PA 66	UL94 V-2	natural
H-3600B	11.1	4.8	12.2	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	black
H-3600	11.1	4.8	12.2	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	natural
H-3605B	11.1	9.7	18.2	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	black
H-3605	11.1	9.7	18.2	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	natural
H-3610B	11.1	18.8	27	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	black
H-3610	11.1	18.8	27	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	natural
H-3615B	11.1	26.7	35	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	black
H-3615	11.1	26.7	35	5.6	15.5	4.8	1.9 max.	1	PA 66	UL94 V-2	natural
H-3601B	11.1	4.8	13	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	black
H-3601	11.1	4.8	13	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	natural
H-3606B	11.1	9.7	18	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	black
H-3606	11.1	9.7	18	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	natural
H-3611B	11.1	18.8	26.9	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	black
H-3611	11.1	18.8	26.9	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	natural
H-3616B	11.1	26.7	34.8	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	black
H-3616	11.1	26.7	34.8	5.6	15.5	4.8	3.2 max.	1	PA 66	UL94 V-2	natural
H-3620B	11.1	3.6	12.2	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	black
H-3620	11.1	3.6	12.2	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	natural
H-3625B	11.1	8.4	18.3	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	black
H-3625	11.1	8.4	18.3	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	natural

Symbol	Wire width	Wire height	C	A	B	Mounting hole diameter	Panel thickness range	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
H-3630B	11.1	17.5	27.2	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	black
H-3630	11.1	17.5	27.2	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	natural
H-3635B	11.1	25.4	35.3	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	black
H-3635	11.1	25.4	35.3	5.6	15.5	4.8	1.9 max.	2	PA 66	UL94 V-2	natural
H-3602B	11.1	3.6	13	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	black
H-3602	11.1	3.6	13	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	natural
H-3607B	11.1	8.4	18	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	black
H-3607	11.1	8.4	18	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	natural
H-3612B	11.1	17.5	27	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	black
H-3612	11.1	17.5	27	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	natural
H-3617B	11.1	25.4	35	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	black
H-3617	11.1	25.4	35	5.6	15.5	4.8	3.2 max.	2	PA 66	UL94 V-2	natural
H-3609	10.9	9.7	16	5.6	13.6	4.8	1.6 max.	3	PA 66	UL94 V-2	natural
H-3618	4.8	10.7	10.7	5.6	13.6	4.8	1.6 max.	5	PA 66	UL94 V-2	natural
H-3652	11.1	19.1	15.9	5.6	25.4	4.8	2.3 max.	3	PA 66	UL94 V-2	white
H-3652B	11.1	19.1	15.9	5.6	25.4	4.8	2.3 max.	3	PA 66	UL94 V-2	black
H-3667	11.1	26.9	15.9	5.6	33.8	4.8	2.3 max.	3	PA 66	UL94 V-2	white
H-3667B	11.1	26.9	15.9	5.6	33.8	4.8	2.3 max.	3	PA 66	UL94 V-2	black
H-3697	11.1	18.3	16.7	5.6	25.4	4.8	2.3 max.	4	PA 66	UL94 V-2	white
H-3697B	11.1	18.3	16.7	5.6	25.4	4.8	2.3 max.	4	PA 66	UL94 V-2	black
H-3712	11.1	26.2	16.7	5.6	33.8	4.8	2.3 max.	4	PA 66	UL94 V-2	white
H-3712B	11.1	26.2	16.7	5.6	33.8	4.8	2.3 max.	4	PA 66	UL94 V-2	black