


M-SGP - Rubber feet

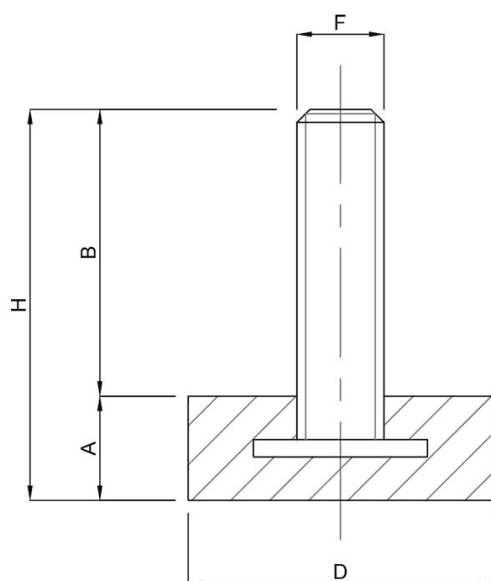

Details:

- **Base material: NBR, 70 Shore**
- **Screw material: steel** (Also available: Stainless steel 1.4301)
- Load values have to be considered referring to static conditions calculated at the half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced.

Symbol	Base height A	Base diameter D	Metric thread F	Stud length B	Height H	Max. load (static)
	[mm]	[mm]		[mm]	[mm]	[N]
M-SGP-30-M6-18	10	30	M6	18	28	1000
M-SGP-30-M6-38	10	30	M6	38	48	1000
M-SGP-30-M8-18	10	30	M8	18	28	1200
M-SGP-30-M8-38	10	30	M8	38	48	1200
M-SGP-30-M10-28	10	30	M10	28	38	1400
M-SGP-30-M10-38	10	30	M10	38	48	1400
M-SGP-30-M12-28	10	30	M12	28	38	1500
M-SGP-35-M8-18	12	35	M8	18	30	1200
M-SGP-35-M8-38	12	35	M8	38	50	1200
M-SGP-35-M10-18	12	35	M10	18	30	1400
M-SGP-35-M10-38	12	35	M10	38	50	1400
M-SGP-35-M12-18	12	35	M12	18	30	1500
M-SGP-35-M12-38	12	35	M12	38	50	1500
M-SGP-35-M8-18-HD	11	35	M8	18	29	1800
M-SGP-35-M8-38-HD	11	35	M8	38	49	2250
M-SGP-35-M10-18-HD	11	35	M10	18	29	3150
M-SGP-35-M10-38-HD	11	35	M10	38	49	3150