


O-SWS / O-SWN - Standard Articulating Adjustable Feet

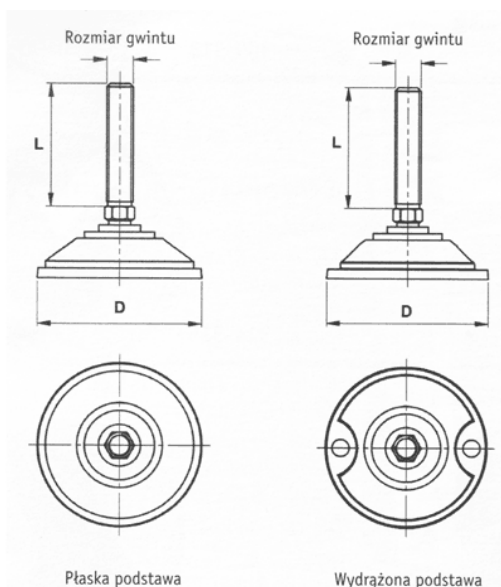

Details:

- **Plain Base with Stainless Steel or ENP Mild Steel Stud**
- Stud manufactured from solid hexagon bar by rolling process ensuring both accuracy and strength of thread
- Nylon base offers high-load capacity, chemical resistance and stability during temperature change
- 10mm diameter mounting hole

Symbol	Metric thread	Stud material	Type	Base diameter D	Stud length L	Approx. load capacity	Standard pack	Material	Color
				[mm]	[mm]		[szt./pcs]		
O-SWS-5560-M8	M8	stainless steel	flat base	55	60	400 kg	48	PA	black
O-SWS-5575-M10	M10	stainless steel	flat base	55	75	500 kg	48	PA	black
O-SWS-5575-M12	M12	stainless steel	flat base	55	75	600 kg	24	PA	black
O-SWS-55125-M12	M12	stainless steel	flat base	55	125	600 kg	24	PA	black
O-SWS-7075-M12	M12	stainless steel	flat base	70	75	1000 kg	24	PA	black
O-SWS-70125-M12	M12	stainless steel	flat base	70	125	1000 kg	8	PA	black
O-SWS-7075-M16	M16	stainless steel	flat base	70	75	1500 kg	8	PA	black
O-SWS-70150-M16	M16	stainless steel	flat base	70	150	1500 kg	4	PA	black
O-SWS-70200-M16	M16	stainless steel	flat base	70	200	1500 kg	4	PA	black
O-SWS-10075-M16	M16	stainless steel	flat base	100	75	2000 kg	4	PA	black
O-SWS-100150-M16	M16	stainless steel	flat base	100	150	2000 kg	4	PA	black
O-SWS-100150-M20	M20	stainless steel	flat base	100	150	2000 kg	4	PA	black
O-SWS-100200-M24	M24	stainless steel	flat base	100	200	2000 kg	4	PA	black
O-SWN-5575-M12	M12	nickel-plated steel	flat base	55	75	600 kg	24	PA	black
O-SWN-55125-M12	M12	nickel-plated steel	flat base	55	125	600 kg	24	PA	black
O-SWN-55150-M12	M12	nickel-plated steel	flat base	55	150	600 kg	8	PA	black
O-SWN-7075-M12	M12	nickel-plated steel	flat base	70	75	1000 kg	24	PA	black
O-SWN-70150-M12	M12	nickel-plated steel	flat base	70	150	1000 kg	8	PA	black
O-SWN-7075-M16	M16	nickel-plated steel	flat base	70	75	1500 kg	8	PA	black
O-SWN-70150-M16	M16	nickel-plated steel	flat base	70	150	1500 kg	4	PA	black
O-SWN-10075-M16	M16	nickel-plated steel	flat base	100	75	2000 kg	4	PA	black
O-SWN-100100-M16	M16	nickel-plated steel	flat base	100	100	2000 kg	4	PA	black
O-SWN-100150-M16	M16	nickel-plated steel	flat base	100	150	2000 kg	4	PA	black
O-SWN-100200-M16	M16	nickel-plated steel	flat base	100	200	2000 kg	4	PA	black

Symbol	Metric thread	Stud material	Type	Base diameter D	Stud length L	Approx. load capacity	Standard pack	Material	Color
				[mm]	[mm]		[szt./pcs]		
O-SWN-100150-M20	M20	nickel-plated steel	flat base	100	150	2000 kg	4	PA	black
O-SWON-10075-M12	M12	stainless steel	bold-down base	100	75	1000 kg	8	PA	black
O-SWON-100125-M12	M12	stainless steel	bold-down base	100	125	1000 kg	8	PA	black
O-SWON-10075-M16	M16	stainless steel	bold-down base	100	75	2000 kg	8	PA	black
O-SWON-100150-M16	M16	stainless steel	bold-down base	100	150	2000 kg	8	PA	black
O-SWON-100150-M20	M20	stainless steel	bold-down base	100	150	2000 kg	4	PA	black
O-SWON-100200-M20	M20	stainless steel	bold-down base	100	200	2000 kg	4	PA	black
O-SWSNW-10075-M12	M12	nickel-plated steel	bold-down base	100	75	1000 kg	8	PA	black
O-SWSNW-100125-M12	M12	nickel-plated steel	bold-down base	100	125	1000 kg	8	PA	black
O-SWSNW-100150-M12	M12	nickel-plated steel	bold-down base	100	150	1000 kg	8	PA	black
O-SWSNW-10075-M16	M16	nickel-plated steel	bold-down base	100	75	2000 kg	8	PA	black
O-SWSNW-100150-M16	M16	nickel-plated steel	bold-down base	100	150	2000 kg	8	PA	black
O-SWSNW-100200-M16	M16	nickel-plated steel	bold-down base	100	200	2000 kg	8	PA	black
O-SWSNW-100150-M20	M20	nickel-plated steel	bold-down base	100	150	2000 kg	4	PA	black
O-SWSNW-100150-M24	M24	nickel-plated steel	bold-down base	100	150	2000 kg	4	PA	black
O-SWSS-3860-M8	M8	stainless steel	flat base	38	60	450 kg	24	steel	-
O-SWSS-3875-M10	M10	stainless steel	flat base	38	75	600 kg	24	steel	-
O-SWSS-5575-M12	M12	stainless steel	flat base	55	75	1500 kg	8	steel	-
O-SWSS-55125-M12	M12	stainless steel	flat base	55	125	1500 kg	8	steel	-
O-SWSS-55160-M12	M12	stainless steel	flat base	55	160	1500 kg	8	steel	-
O-SWSS-7075-M16	M16	stainless steel	flat base	70	75	2000 kg	4	steel	-
O-SWSS-70150-M16	M16	stainless steel	flat base	70	150	2000 kg	4	steel	-
O-SWSS-70200-M16	M16	stainless steel	flat base	70	200	2000 kg	4	steel	-
O-SWSS-100150-M20	M20	stainless steel	flat base	100	150	3000 kg	4	steel	-
O-SWSN-70150-M16	M16	stainless steel	flat base	70	150	2000 kg	4	steel	-
O-SWSN-100150-M20	M20	stainless steel	flat base	100	150	3000 kg	4	steel	-