


## OR-DL-WM-PG - Plastic cable glands, ventilated, PG thread

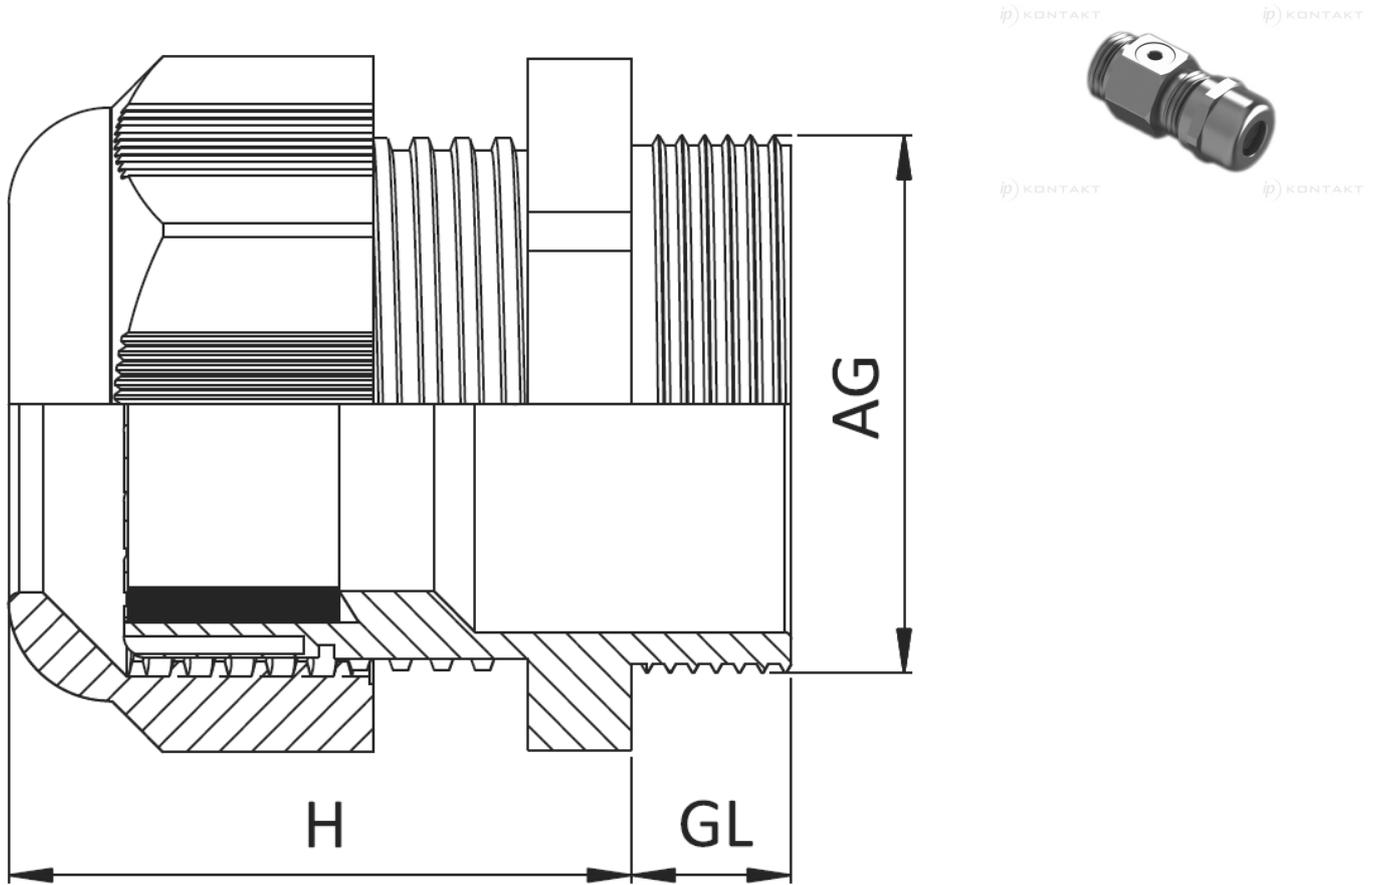

### Details:

- **Body material: brass with/without nickel plated / AISI303/316L Stainless Steel**
- **Plastic part: PA6 V2 / V0**
- **Sealing: TPV / Silicone**
- **O-ring: NBR / EPDM / Silicone**
- **Vent part: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)**
- **Protection class: IP68**
- **Temperature Range: -40 °C +105 °C**
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

Symbol	PG thread	H	Thread length GL	Wrench size SW	Mounting hole diameter	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	
OR-DL-WMB-PG7	PG7	31.5	6	17	13	4 - 8	brass
OR-DL-WMS-PG7	PG7	31.5	6	17	13	4 - 8	stainless steel
OR-DL-WMB-PG7-L	PG7	31.5	8	17	13	4 - 8	brass
OR-DL-WMS-PG7-L	PG7	31.5	8	17	13	4 - 8	stainless steel
OR-DL-WMB-PG9	PG9	31.5	6	17	16	4 - 8	brass

Symbol	PG thread	H	Thread length GL	Wrench size SW	Mounting hole diameter	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	
OR-DL-WMS-PG9	PG9	31.5	6	17	16	4 - 8	stainless steel
OR-DL-WMB-PG9-L	PG9	31.5	8	17	16	4 - 8	brass
OR-DL-WMS-PG9-L	PG9	31.5	8	17	16	4 - 8	stainless steel
OR-DL-WMB-PG11	PG11	33.5	6	20	19	5 - 10	brass
OR-DL-WMS-PG11	PG11	33.5	6	20	19	5 - 10	stainless steel
OR-DL-WMB-PG11-L	PG11	33.5	8	20	19	5 - 10	brass
OR-DL-WMS-PG11-L	PG11	33.5	8	20	19	5 - 10	stainless steel
OR-DL-WMB-PG13.5	PG13.5	35	6.5	22	21	6 - 12	brass
OR-DL-WMS-PG13.5	PG13.5	35	6.5	22	21	6 - 12	stainless steel
OR-DL-WMB-PG13.5-L	PG13.5	35	8	22	21	6 - 12	brass
OR-DL-WMS-PG13.5-L	PG13.5	35	8	22	21	6 - 12	stainless steel