




SLG / SLPL / SLPB - Snap Latch




SLPL-1L ~ SLPL-4L





SLPB-1L ~ SLPB-4L



SLPB-1M ~ SLPB-4M



SLPB-1S ~ SLPB-2S

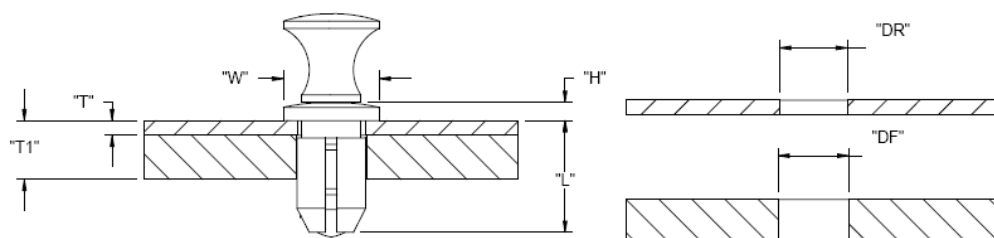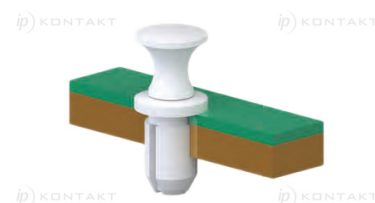

Details:

- **Material: Plunger; UL94V2 Nylon 6, RMS-120***
- **Grommet; UL94 V2 Polycarbonate, RMS-72***
- **Colour: black (BLK), white (WH)**
- To install, push the grommet into the removable panel and then the desired plunger into the grommet. When the panel and plunger are pushed into the fixed panel, it locks them together
- Simply pull on the plunger to remove the non-fixed panel
- Grommet and mating plunger are sold separately
- Standard Pack: 1000/Bag

Symbol	Head diameter W	Head height H	L	Panel thickness T	Panel thickness range T1	Mounting hole diameter range DR	Mounting hole diameter range DF	Plug	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
SLG-1L-B	10.8	2	9	1.6	2 - 4.2	7.5 - 7.7	8 - 8.2	SLPB-1L-B or SLPL-1L-B	PC + PA 6	UL94 V-2	black
SLG-1L-W	10.8	2	9	1.6	2 - 4.2	7.5 - 7.7	8 - 8.2	SLPB-1L-W	PC + PA 6	UL94 V-2	white
SLG-1M-B	8.5	1.8	8	1.1	1.5 - 3.7	5.95 - 6.1	6.35 - 6.5	SLPB-1M-B	PC + PA 6	UL94 V-2	black
SLG-1M-W	8.5	1.8	8	1.1	1.5 - 3.7	5.95 - 6.1	6.35 - 6.5	SLPB-1M-W or SLPL-1L-W	PC + PA 6	UL94 V-2	white
SLG-1S-B	6.5	1.2	7.6	1	2 - 4	4.5 - 4.6	4.7 - 4.8	SLPB-1S-B	PC + PA 6	UL94 V-2	black
SLG-1S-W	6.5	1.2	7.6	1	2 - 4	4.5 - 4.6	4.7 - 4.8	SLPB-1S-W	PC + PA 6	UL94 V-2	white
SLG-2L-B	10.8	2	10	2.5	3 - 5.2	7.5 - 7.7	8 - 8.2	SLPB-2L-B or SLPL-2L-B	PC + PA 6	UL94 V-2	black
SLG-2L-W	10.8	2	10	2.5	3 - 5.2	7.5 - 7.7	8 - 8.2	SLPB-2L-W	PC + PA 6	UL94 V-2	white
SLG-2M-B	8.5	1.8	8.5	1.6	2 - 4.2	5.95 - 6.1	6.35 - 6.5	SLPB-2M-B	PC + PA 6	UL94 V-2	black
SLG-2M-W	8.5	1.8	8.5	1.6	2 - 4.2	5.95 - 6.1	6.35 - 6.5	SLPB-2M-W or SLPL-2L-W	PC + PA 6	UL94 V-2	white
SLG-2S-B	6.5	1.2	8.1	1.5	2.5 - 4.5	4.5 - 4.6	4.7 - 4.8	SLPB-2S-W	PC + PA 6	UL94 V-2	black
SLG-2S-W	6.5	1.2	8.1	1.5	2.5 - 4.5	4.5 - 4.6	4.7 - 4.8	SLPB-2S-B	PC + PA 6	UL94 V-2	white
SLG-3M-B	8.5	1.8	9.5	2.5	3 - 5.2	5.95 - 6.1	6.35 - 6.5	SLPB-3M-B	PC + PA 6	UL94 V-2	black
SLG-3M-W	8.5	1.8	9.5	2.5	3 - 5.2	5.95 - 6.1	6.35 - 6.5	SLPB-3M-W	PC + PA 6	UL94 V-2	white