


## FP-8821 -

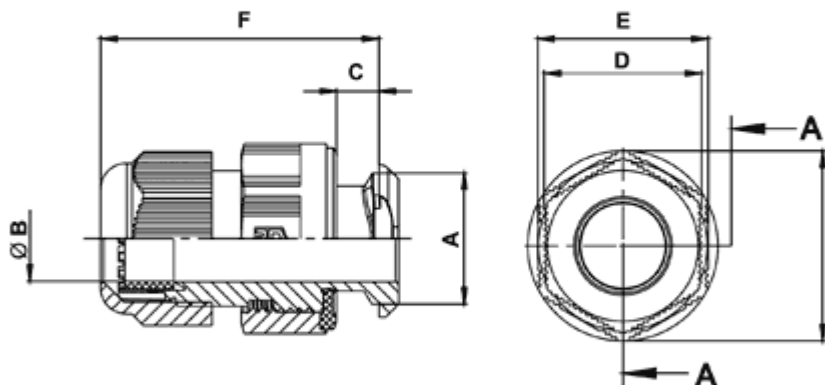

### Details:

- Material Dome nut: Nylon 6
- **Material gland body: Nylon 6**
- Material mounting nut: Nylon 6 GF30
- Material O-Ring: NBR/PTFE
- Protection grade: IP68
- Flammability: UL94V2
- Material Sealing ring: Polychloroprene - Nitrile CR/NBR
- Operating temperature: -20°C ~ +100° C
- **Color: dark grey (RAL 7001), light grey (RAL 7035), black (RAL 9005)**
- Metric as per DIN EN 50262

| Symbol       | Metric thread<br>A | Mounting hole<br>diameter<br>range | Cable<br>diameter<br>range<br>ØB | C         | Wrench<br>size<br>D | E    | F    | Material | Flammability | Color      | Standard<br>pack |
|--------------|--------------------|------------------------------------|----------------------------------|-----------|---------------------|------|------|----------|--------------|------------|------------------|
|              |                    | [mm]                               | [mm]                             | [mm]      | [mm]                | [mm] | [mm] |          |              |            | [szt./pcs]       |
| 8823AA117035 | M25                | 25.1 - 25.4                        | 11 - 17                          | 1.0 - 4.0 | 29                  | 32   | 48   | PA 6     | UL94 V-2     | light gray | 50               |